

Luminaire Construction

CNC machined from one of the following metals:

Aluminium

High corrosion resistant aluminium with chromate substrate and high UV resistant polyester powder coat.

Body: mm (1/2") x BPMROLG

DOXPLLXPURG

Colours:

Black, Bronze, Corten, Dark Grey, Olive Green, Silver Star, White, White Birch.

Copper

GOLG

SSHG

316 Stainless Steel

GHOHSOLKHG

OLGLOHHHOG

LH

6LOH6HHO

OLU

LLHSSOLHGKLLK

KHHKHLONKHJH

HOLLJJKOHLKH

OJHKHLHLGHJHGL

KJKKOHGHLHGL

SLLSLJOLSKH

OLLHLKHOGKHLH2

LJ

Features

Lens

10mm (3/8") clear flush fit shatter resistant glass.

Lifetime Warranty.


Gasket

Silicone, iron impregnated 220°C (428°F).

Lamp Holder

GU5.3 & GU10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) Teflon cables.

Standards

IP66, 

Luminaire WeighW

OXPLLP NJR

&RSSHNJOER

6WDLOHV6V6WHHONJOER

3RZHU6XSSO

XDZUDVIRUPHURW

LFOXGHG

/DPS2SWLRM

05RUZDWWODPSPD

8RUZDWWODPSPD










86DG&DDGD

05RUZDWWODPSPD

8ODPSRWXSSOLHG

Accessories

Frosted Lens (Cat. LENSSTEPF).

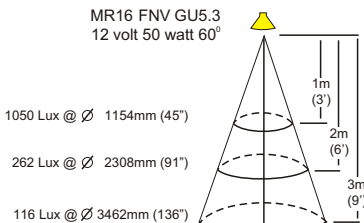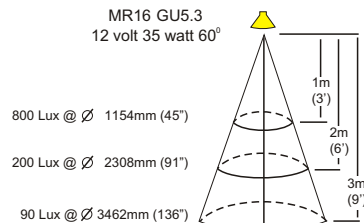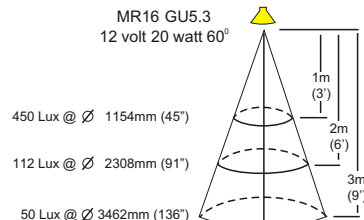

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2011 Hunza Holdings Ltd.

Ver 1.4