

# Twig Lite

Cat. No. TG

Cat. No. TG/R



The Twig Lite has a subtle appearance, which allows it to blend into taller foliage. The luminaire has a frosted glass lens to reduce glare and is operated with a 5, 10 or 20 watt G4 Bi-pin halogen lamp.

The Retro, which is a mains option, avoids the need to bury a transformer. The 110/240 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer. The transformer has an IP56 rating.

## Order Information

### Luminaire Type

TG - Twig Lite  
TG/R - Twig Lite Retro


### Material/Finish

COP - Copper  
SS - Stainless Steel

### Accessories

CJK150 - Cable Joint Kit  
SSP/G - Super Spike  
(not for Retro)

Ordering example: TG COP - Twig Lite in Copper  
TG/R SS - Twig Lite Retro in  
Stainless Steel  
SSP/G - Super Spike  
(accessories ordered separately)

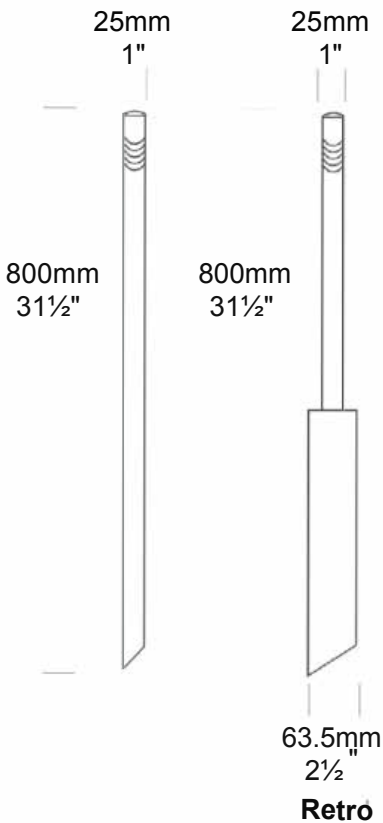

**HUNZA**™ PURE  
OUTDOOR  
LIGHTING

HUNZA FACTORY  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunzalighting.com

INTERNATIONAL CONTACTS:  
[http://www.hunzalighting.com/  
contact.php](http://www.hunzalighting.com/contact.php)  
Specification may change without notice.  
Manufactured in New Zealand.  
© 2016 Hunza Holdings Ltd.

## Luminaire Construction

**CNC machined from one of the following metals:**

### Copper

End cap: solid brass 25.4mm (1") rod.  
Pole: 25.4mm (1") x 800mm (31½") copper tube.

Retro pole: 25.4mm (1") x 400mm (15¾") and 63.5mm (2½") x 400mm (15¾") copper tube.

### 316 Stainless Steel

End cap: solid 316 stainless steel 25.4mm (1") rod.

Pole: 25.4mm (1") x 800mm (31½") stainless steel tube.

Retro pole: 25.4mm (1") x 400mm (15¾") and 63.5mm (2½") x 400mm (15¾") stainless steel tube.

## Mounting

Pole 800mm (31½") directly mounted into the earth or for extra stability in sand or loose ground, use a Super Spike (Cat. SSP/G). Can also be set in concrete.

## Features

### Lens

22mm (¾") frosted glass tube.

### Gaskets

Nytrol 150°C (302°F).

### Lamp Holders


G4 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) Teflon cables.

## Accessories

**Cable Joint Kit** (Cat. CJK150). Not approved for USA/Canada.

**Super Spike** (Cat. SSP/G).

## Standards

IP44, UL1838, 

## Luminaire Weight

12 volt - **Copper** - 0.800kg (1lb 12oz)  
**Stainless Steel** - 0.800kg (1lb 12oz)  
Retro - **Copper** - 1.980kg (4lb 5oz)  
**Stainless Steel** - 1.980kg (4lb 5oz)

## Power Supply

**12 volt** - Hunza Inground or Wall Mount Transformer: not included.

### USA and Canada

Hunza Wall Mount Transformer: not included.

**Retro** - Hunza 110/240-12 volt ac silicone encapsulated electronic transformer is built into the pole, IP56. Dimmable with a suitable dimmer.

## Lamp Options

### 12 volt

G4 - 5, 10 or 20 watt lamp max.


### USA and Canada

G4 - 5 or 10 watt lamp max.

### Retro

G4 - 10 or 20 watt lamp max.

Twig Lite G4 10 watt Bi-Pin lamp - Lens height 700mm (27½")

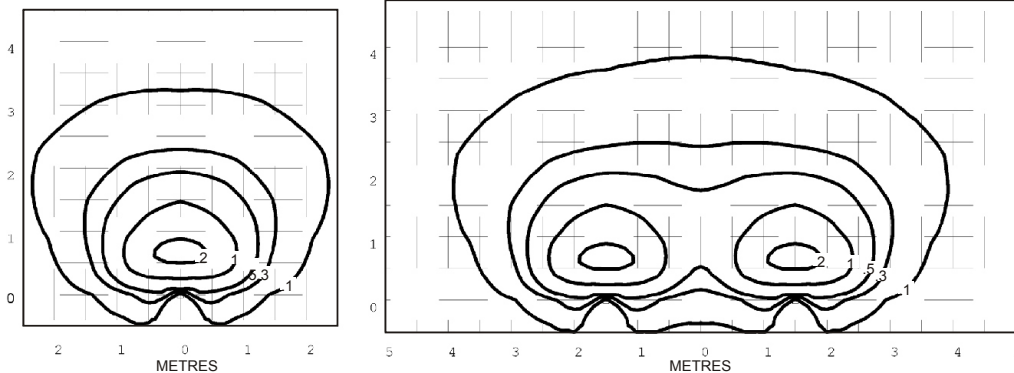

Twig Lite G4 20 watt Bi-Pin lamp - Lens height 700mm (27½")



Isolux Lumens Plot - Footcandles = Isolux figures divided by 10.76

**HUNZA**™ PURE  
OUTDOOR  
LIGHTING

HUNZA FACTORY  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunzalighting.com

INTERNATIONAL CONTACTS:  
<http://www.hunzalighting.com/contact.php>  
Specification may change without notice.  
Manufactured in New Zealand.  
© 2016 Hunza Holdings Ltd.