

# Walkway Lite

Cat. No. WW

Cat. No. WW/R





The Walkway Lite has a subtle, unobtrusive appearance that allows it to blend into a landscape while providing a soft, effective pathway illumination.

Constructed from solid copper or 316 stainless steel with a solid brass or 316 stainless steel elbow and stainless steel grub screws.

The Retro, which is a mains option, avoids the need to bury a transformer. The 110/240-12 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer. The transformer has an IP56 rating.

## Ordering Information

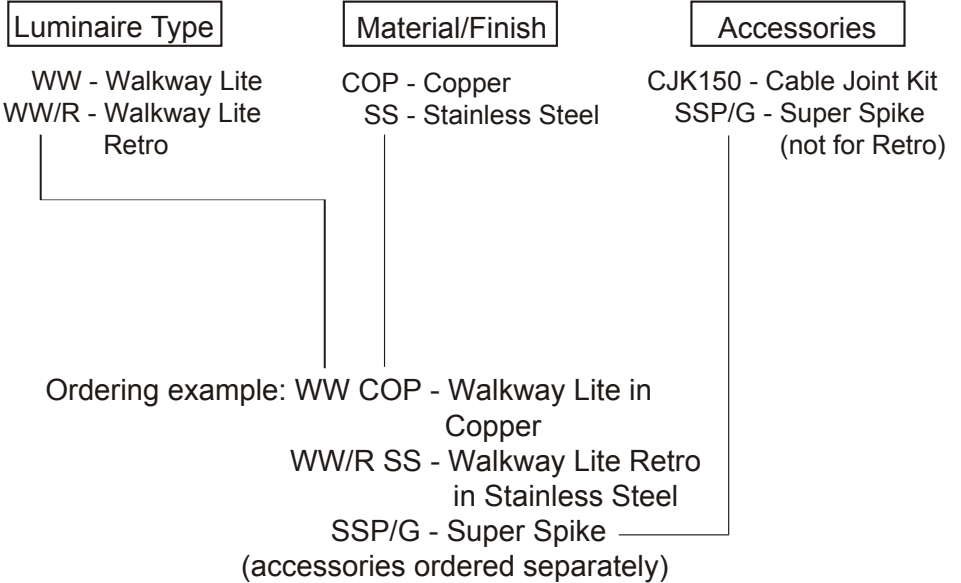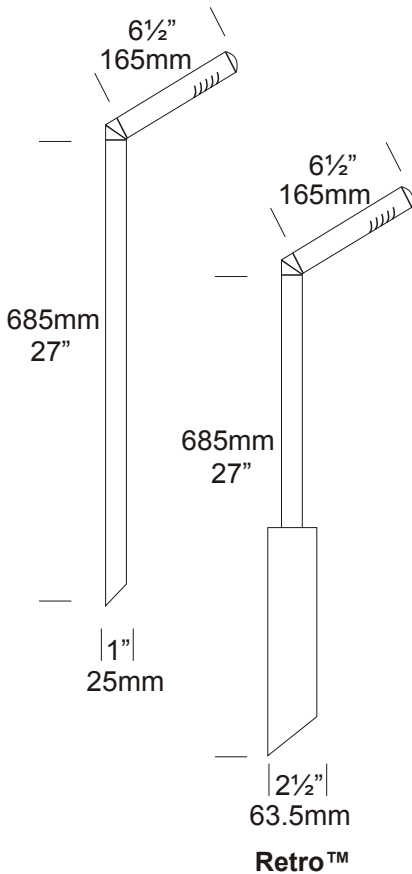

**HUNZA**™ PURE OUTDOOR LIGHTING

HUNZA FACTORY  
 130 Felton Mathew Ave  
 Glen Innes  
 Auckland 1072  
 New Zealand

Ph: 64-9-528 9471  
 Fax: 64-9-528 9361  
 hunza@hunza.co.nz  
 www.hunzalighting.com

INTERNATIONAL CONTACTS:  
<http://www.hunzalighting.com/contact.php>  
 Specification may change without notice.  
 Manufactured in New Zealand.  
 © 2016 Hunza Holdings Ltd.

## Luminaire Construction

**CNC machined from one of the following metals:**

### Copper

End cap: solid brass 25.4mm (1") rod.

Elbow: investment cast in brass.

Head: 25.4mm (1") x 165mm (6½") copper tube.

Pole: 25.4mm (1") x 685mm (27") copper tube.

Retro pole: 25.4mm (1") x 285mm (11¼") and 63.5mm (2½") x 400mm (15¾") copper tube.

### 316 Stainless Steel

End cap: solid stainless steel 25.4mm (1") rod.

Elbow: investment cast in stainless steel.

Head: 25.4mm (1") x 165mm (6½") stainless steel tube.

Pole: 25.4mm (1") x 685mm (27") stainless steel tube.

Retro pole: 25.4mm (1") x 285mm (11¼") and 63.5mm (2½") x 400mm (15¾") stainless steel tube.

## Mounting

Pole 685mm (27") directly mounted into the earth or for extra stability in sand or loose ground, use a Super Spike (Cat. SSP/G). Can also be set in concrete.

## Features

### Lens

22mm (¾") frosted glass tube.

### Gaskets

Nytrol 150°C (302°F).

### Lamp Holders


G4 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) Teflon cables.

## Accessories

**Cable Joint Kit** (Cat. CJK150). Not approved for USA/Canada.

**Super Spike** (Cat. SSP/G).

## Standards

IP44, UL1838, 

## Luminaire Weight

12 volt - **Copper** - 1.100kg (2lb 6oz)

**Stainless Steel** - 1.100kg (2lb 6oz)

Retro - **Copper** - 2.380kg (5lb 3oz)

**Stainless Steel** - 2.380kg (5lb 3oz)

## Power Supply

**12 volt** - Hunza Inground or Wall Mount Transformer: not included.

### USA and Canada

Hunza Wall Mount Transformer: not included.

**Retro** - Hunza 110/240-12 volt ac silicone encapsulated electronic transformer is built into the pole, IP56. Dimmable with a suitable dimmer.

## Lamp Options

### 12 volt

G4 - 5, 10 or 20 watt lamp max.



### USA and Canada

G4 - 5 or 10 watt lamp max.



### Retro

G4 - 10 or 20 watt lamp max.

Walkway Lite G4 10 watt Bi-Pin lamp - Lens height 650mm (25½")

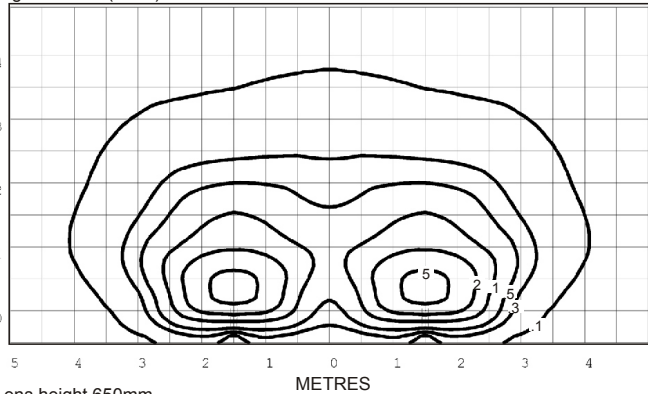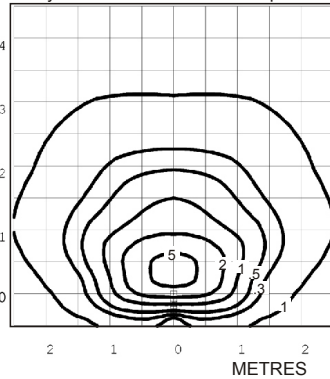

Walkway Lite G4 20 watt Bi-Pin lamp - Lens height 650mm (25½")

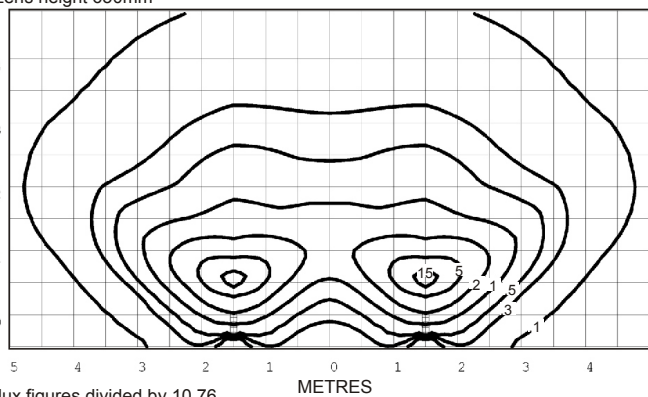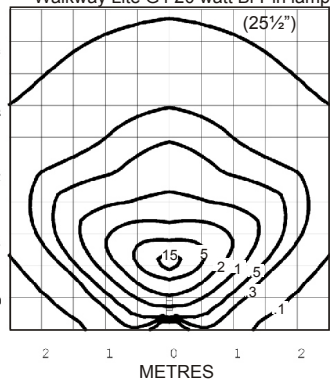

Isolux Lumens Plot - Footcandles = Isolux figures divided by 10.76

**HUNZA**™ PURE  
OUTDOOR  
LIGHTING

HUNZA FACTORY  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunzalighting.com

INTERNATIONAL CONTACTS:  
[http://www.hunzalighting.com/  
contact.php](http://www.hunzalighting.com/contact.php)  
Specification may change without notice.  
Manufactured in New Zealand.  
© 2016 Hunza Holdings Ltd.