


Cube Bollard Cloak PURE LED

Cat. No. CBOLCL



PURE LED
Pure Performance

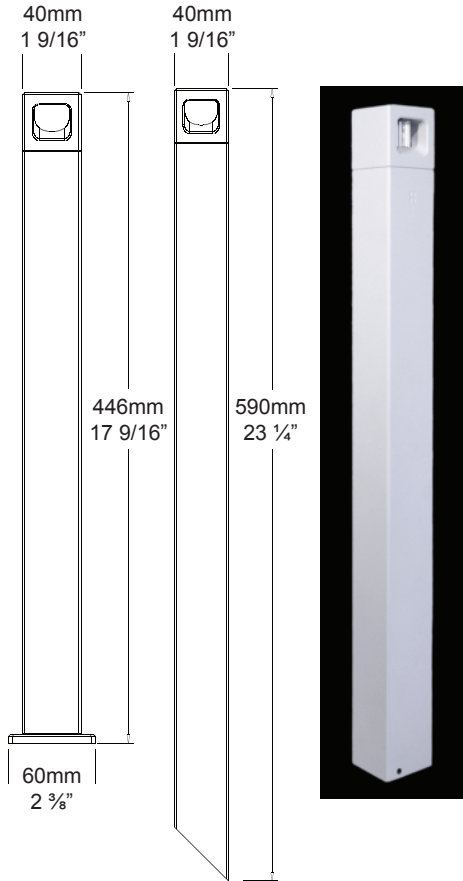

The Cube Bollard Cloak is ideal for illuminating walkways and pathways. With its bold and striking features, this bollard will greatly enhance your outdoor space with a distinctive modern flair.

The Cube Bollard Cloak is constructed from solid Aluminium with a polyester UV stable powder coat.

The Hunza PURE LED system uses Cree XTE chips for maximum performance and long life. Power supply options include a choice of 12 volt driver or an external remote driver (series connection). The PURE LED system incorporates HUNZA's Plug-and-Play system for easy replacement of either the LED engine or 12 volt driver in the field. Four cloak options and a choice of 3000K, 4000K, 5000K and Blue colour temperatures are available.

Ordering Information

Luminaire	Driver mA	Colour Temp	Accessories	Material/Finish
CBOLCL1	S - Series	2 - 2700K	FM - Flange Mount	BK - Black
CBOLCL2	D3 - 12v 350mA	3 - 3000K	CJK - Cable Joint Kit	BZ - Bronze
CBOLCL3	D7 - 12v 700mA	4 - 4000K		WH - White
CBOLCL4		5 - 5000K		STAR - Silver Star
		B - Blue		
		39 - 3000K (90+ CRI)		

Ordering Example: CBOLCL1 S 3 FM BK

HUNZATM
PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471 Fax:
64-9-528 9361
hunza@hunza.co.nz
www.hunzalighting.com

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2014 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from one of the following metals:

Aluminium

Pole: High corrosion resistant 40mm (1 9/16") x 4mm (3/16") aluminium square tube
Head: 40mm (1 9/16") x 40mm (1 9/16") solid aluminium, with chromate substrate and high UV resistant polyester powder coat.
Colours: Black, Bronze, White, Silver Star.

Luminaire Features

Lens:

Acrylic lens.

Do not clean with petrochemical substances.

Gasket:

Silicone, iron impregnated 220°C (428°F)

Accessories:

Cable Joint Kit (Cat. CJK150)

Flange Mount (Cat. FM)

Mounting

Set in concrete in the ground or specify with flange mount option, which bolts into concrete, tiling or wooden deck.

Technical Information

Standards

AS/NZS 61046

IP66/IP67, UL 1838, 2108

LED (4-cloak version)

Cree XTE Plug-and-Play, field replaceable LED board.

Lumen Output: 120 @ 1050mA

Lumens Per watt: 40 minimum

CRI Warm White (3000k): 85+

Colour Temp: 2700K, 3000K, 4000K, 5000K or Blue.

High CRI Option (3000K): 90+ (lumen output decreases by 15%)

Power Supply

External (Series) Driver Constant current driver

Output: 3vdc at 1050mA maximum

Integral 12 Volt Driver Buckbullet Driver:

Input: 12vac 3watt at 700mA

Output: 3vdc nominal, 350mA or 700mA

Transformer

Hunza wall Mount Transformer for use with integral 12 volt driver.

Cube Bollard Cloak - Light Pattern

