


Cube Bollard Cloak

PURE LED

Cat. No. CBOLCL



PURE LED
Pure Performance

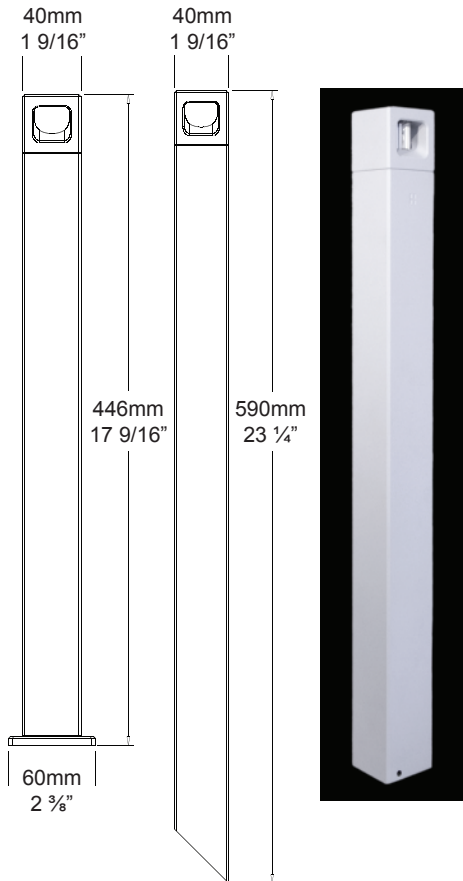


The Cube Bollard Cloak is ideal for illuminating walkways and pathways. With its bold and striking features, this bollard will greatly enhance your outdoor space with a distinctive modern flair.

The Cube Bollard Cloak is constructed from solid Aluminium with a layer of polyester UV stable powder coat.

The Hunza PURE LED system uses Cree XTE chips for maximum performance and long life. Power supply options include a choice of 12 volt driver or an external remote driver (series connection). The PURE LED system incorporates HUNZA's Plug-and-Play system for easy replacement of either the LED engine or 12 volt driver in the field. Four cloak options and a choice of 3000K, 4000K, 5000K and Blue colour temperatures are available.

Ordering Information

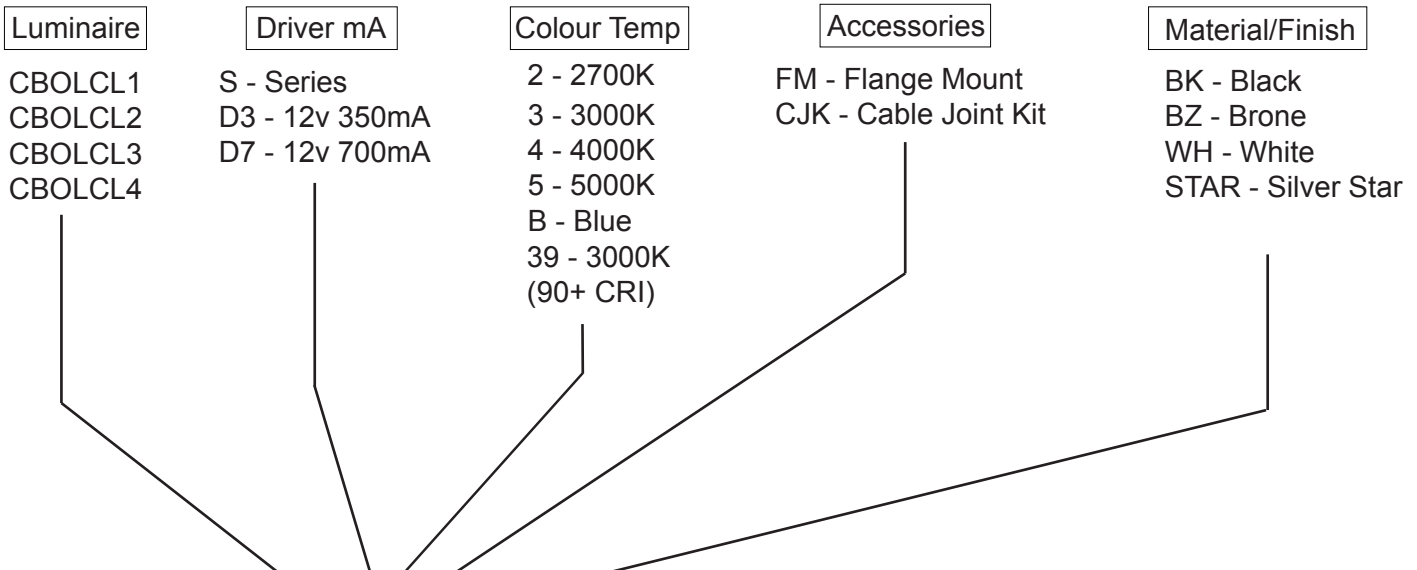

Ordering Example: CBOLCL1 S 3 FM BK

HUNZATM
PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2014 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from one of the following metals:

Aluminium

Pole: High corrosion resistant 40mm (1 9/16") x 4mm (3/16") aluminium square tube
Head: 40mm (1 9/16") x 40mm (1 9/16") solid aluminium, with chromate substrate and high UV resistant polyester powder coat.
Colours: Black, Bronze, White, Silver Star.

Luminaire Features

Lens:

Acrylic lens.

Do not clean with petrochemical substances.

Gasket:

Silicone, iron impregnated 220°C (428°F)

Accessories:

Cable Joint Kit (Cat. CJK150)

Flange Mount (Cat. FM)

Mounting

Set in concrete in the ground or specify with flange mount option, which bolts into concrete, tiling or wooden deck.

Technical Information

Standards

AS/NZS 61046

IP66/IP67

LED (4-cloak version)

Cree XTE Plug-and-Play, field replaceable LED board.

Lumen Output: 120 @ 1050mA

Lumens Per watt: 40 minimum

CRI Warm White (3000k): 85+

Colour Temp: 3,000 or 4,000K

High CRI Option (3000K): 90+
(lumen output decreases by 15%)

Power Supply

External (Series) Driver

Constant current driver

Output: 3vdc at 1050mA maximum

Integral 12 Volt Driver Buckbullet

Driver:

Input: 12vac 3watt at 700mA

Output: 3vdc nominal, 350mA or 700mA

Transformer

Hunza wall Mount Transformer for use with integral 12 volt driver.

Cube Bollard Cloak - Light Pattern

