


# Cube Pillar Lite PURE LED

Cat. No. CPIL

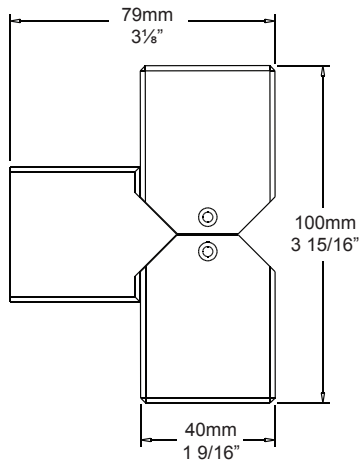

**PURE LED**  
Pure Performance

The Cube Pillar Lite illuminates both upwards and downwards, giving columns, gateway pillars and entrances a dramatic effect.

The Cube Pillar Lite is constructed from solid Aluminium finished with a polyester UV stable powder coat or from 316 Stainless Steel.

The Hunza PURE LED system uses Cree XTE chips for maximum performance and long life. Power supply is a remote 12 volt driver (series connection). The PURE LED system incorporates HUNZA's Plug-and-Play system for easy replacement of the LED light engine. Four beam angles and a choice of 3000K, 4000K, 5000K and Blue colour temperatures are available.

## Ordering Information

Luminaire	Driver mA	Beam Angle	Colour Temp	Accessories	Material/Finish
CPIL	S - Series	15 - 15° TIR Lens 25 - 25° TIR Lens 45 - 45° TIR Lens	2 - 2700K 3 - 3000K 4 - 4000K 5 - 5000K B - Blue 39 - 3000K (90+ CRI)	WB - Wall Box Adaptor DM - Dual Mounting Fixed Plate DMA - Dual Mounting Adj. Plate CJK - Cable Joint Kit	SS-Stainless Steel BK - Black BZ - Bronze WH - White STAR - Silver Star

Ordering Example: CPIL S 15 3 WB BK

**HUNZA**<sup>TM</sup>  
PURE  
OUTDOOR  
LIGHTING

HUNZA FACTORY  
130 Felton Mathew Ave  
Saint Johns  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunza.co.nz

INTERNATIONAL CONTACTS:  
[www.hunza.co.nz/contacts.php](http://www.hunza.co.nz/contacts.php)

Specifications may change without notice.  
Manufactured in New Zealand.  
© 2014 Hunza Holdings Ltd.

## Luminaire Construction

**CNC machined from one of the following metals:**

### Aluminium

Body: 40mm (1 9/16") x 40mm (1 9/16") solid aluminium  
Heads: 40mm solid (1 9/16") x 40mm (1 9/16") solid aluminium.  
High corrosion resistant with chromate substrate and high UV resistant polyester powder coat.  
Colours: Black, Bronze, White, Silver Star.

### 316 Stainless Steel

Body: 40mm (1 9/16") x 40mm (1 9/16") 316 stainless steel  
Head: 40mm (1 9/16") x 40mm (1 9/16") 316 stainless steel.

## Luminaire Features

### Lens

TIR lens with lifetime warranty.

### Gasket

Silicone, iron impregnated 220°C (428°F)

### Accessories

Cable Joint Kit (Cat. CJK150)  
Wall Box Adaptor (Cat. WB)  
Dual Mount Fixed Plate (Cat. DM)  
Dual Mount Adjustable Plate (Cat. DMA)

### Mounting

The luminaire is mounted to the wall using two 5 gauge screws through a mounting disk

## Technical Information

### Standards

AS/NZS 61046  
IP66, UL 1838, 2108

### LED (per head)

Cree XTE Plug-and-Play, field replaceable LED board.

**Lumen Output:** 180 @ 1050mA

**Lumens Per watt:** 60 minimum

**CRI Warm White (3000k):** 85+

**Colour Temp:** 3000K, 4000K, 5000K or Blue.

**High CRI Option (3000K):** 90+ (lumen output decreases by 15%)


### Power Supply

**External (Series) Driver (per head)**


Constant current driver

Output: 3vdc at 1050mA maximum


## Reflector Beam Angles



15° TIR Lens



25° TIR Lens

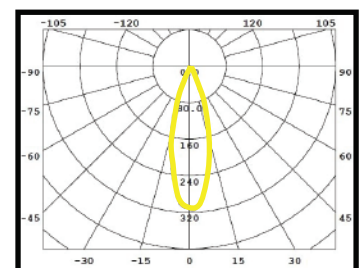

45° TIR Lens

**HUNZA**™ PURE  
OUTDOOR  
LIGHTING

HUNZA FACTORY  
130 Felton Mathew Ave  
Saint Johns  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunza.co.nz

INTERNATIONAL CONTACTS:  
[www.hunza.co.nz/contacts.php](http://www.hunza.co.nz/contacts.php)

Specifications may change without notice.  
Manufactured in New Zealand.  
© 2014 Hunza Holdings Ltd.