


Cube Pillar Lite PURE LED

PROJECT:
TYPE:
SOURCE:
NOTES:

SPECIFICATIONS PER HEAD




LED Chip	Cree XPG-3 Plug and Play field replaceable LED board
Luminaire Output Per Head	180 Lumens @ 1050mA, delivered from luminaire with unobstructed beam.
Lumens Per Watt	60 Lumens minimum @ 3 watts, delivered from luminaire with unobstructed beam
CRI (3000K)	90+
Colour Temperatures	2700K, 3000K, 4000K
Beam Angles	15, 25, 45
Ingress Protection	IP66
Warranty	Electronics = 5 years Body Stainless Steel = 10 years Body Aluminium = 5 years
Standards	AS/NZS 61046 cUL 1838, 2108, 1598 CSA 22.2 No. 250.7, No. 250.0-08, No. 250.0 CE

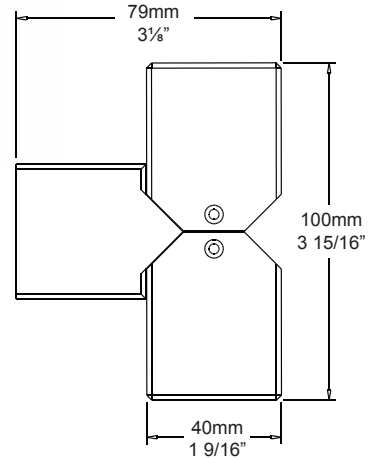

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. CPIL/L

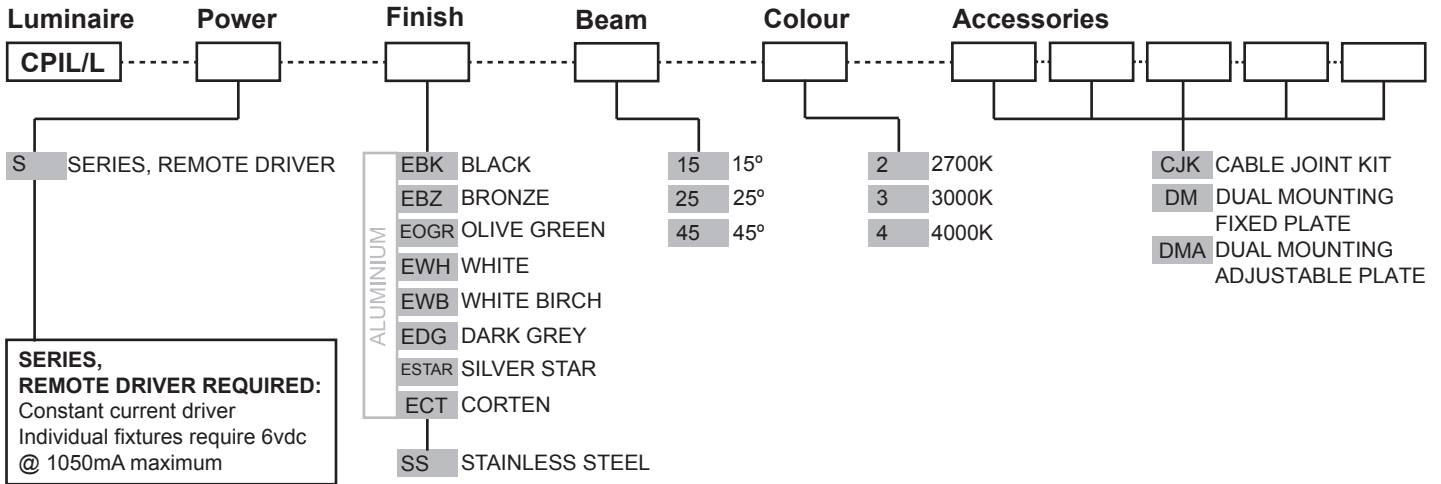

ADDITIONAL COMMENTS:

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Aluminium:

Body: high corrosion resistant 40mm (1½") x 40mm (1½") solid aluminium.

Head: 40mm (1½") x 40mm (1½") high corrosion resistant aluminium with chromate substrate and high UV resistant polyester powder coat.

Colours:

Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

316 Stainless Steel:

Body: 40mm (1½") x 40mm (1½") 316 stainless steel.

Head: 40mm (1½") x 40mm (1½") 316 stainless steel.

Lens:

TIR lens with lifetime warranty

Gaskets:

Silicone, iron impregnated 220°C (428°F)

Mounting:

The luminaire is mounted to the wall using two 5 gauge screws through a mounting disk.

Luminaire Weight:

Alum: 0.775kg (1lb 11oz)


SS: 1.750kg (3lb 14oz)

ACCESSORIES

BEAM ANGLES

High efficiency PMMA TIR lenses. Field replaceable

IES files available for download: <http://www.hunzalighting.com/download.php>

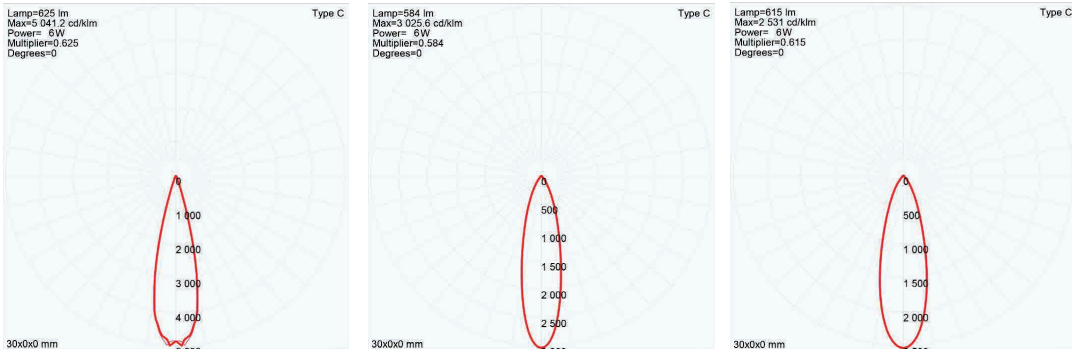


15° FWHM TIR

25° FWHM TIR

45° FWHM TIR

WIRING GUIDE

Series/remote driver

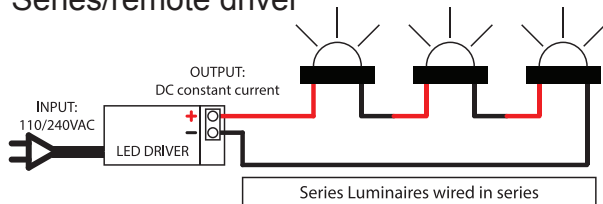

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

available for download: <http://www.hunzalighting.com/download.php>

12v integral driver

