


Cube Pole Spot PURE LED

| |
|----------|
| PROJECT: |
| TYPE: |
| SOURCE: |
| NOTES: |

SPECIFICATIONS



| | |
|----------------------------|---|
| LED Chip | Cree XPG-3 Plug and Play field replaceable LED board |
| Luminaire Output | 200 Lumens @ 1050mA, delivered from luminaire with unobstructed beam. |
| Lumens Per Watt | 67 Lumens minimum @ 1 watt, delivered from luminaire with unobstructed beam |
| CRI (3000K) | 90+ |
| Colour Temperatures | 2700K, 3000K, 4000K |
| Beam Angles | 15, 25, 45 |
| Ingress Protection | IP66 |
| Warranty | Electronics = 5 years Body Aluminium = 5 years |
| Standards | AS/NZS 61046 cUL 1838, 2108 CSA C22.2 No.250.7, No.250.0-08 CE |

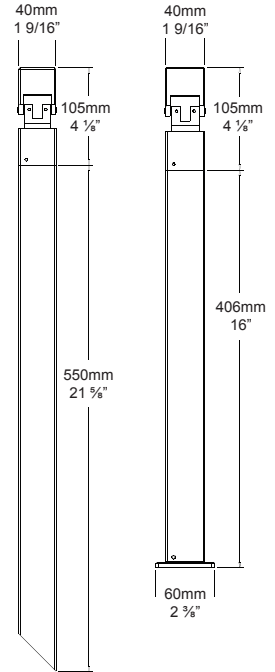

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. CPS/L

| Luminaire | Power | Material/Finish | Beam | Colour | Accessories |
|--|----------------------|---|---|--|--|
| <input type="text" value="CPS/L"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| S SERIES, REMOTE DRIVER D3 12VAC, 2W INTEGRAL D7 12VAC, 4W INTEGRAL | | ALUMINIUM EBK BLACK EBZ BRONZE EOGR OLIVE GREEN EWH WHITE EWB WHITE BIRCH EDG DARK GREY ESTAR SILVER STAR ECT CORTEN | 15 15° 25 25° 45 45° | 2 2700K 3 3000K 4 4000K | CJK CABLE JOINT KIT FM FLANGE MOUNT |
| SERIES, REMOTE DRIVER REQUIRED: Constant current driver Individual fixtures require 3vdc @ 1050mA maximum 12VAC INTEGRAL DRIVER: Buckbullet driver (included) Input: 12VAC Output: 3vdc @ D3=350mA, D7=700mA | | | | | |

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Aluminium:

Pole: High corrosion resistant 40mm (1½") x 4mm (3/16") aluminium square tube.
 Head: 40mm (1½") x 40mm (1½") solid aluminium square bar, with chromate substrate and high UV resistant polyester powder coat.

Colours:

Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

Lens:

Acrylic TIR lens.

Do not clean with petrochemical substances.

Gaskets:

Silicone, iron impregnated 220°C (428°F)

Mounting:

Set in concrete in the ground or specify with flange mount option, which bolts to concrete, tiling or wooden decks.


Luminaire Weight:

Alum: 0.500kg (1lb 2oz)

ACCESSORIES

BEAM ANGLES


IES files available for download: <http://www.hunzalighting.com/download.php>

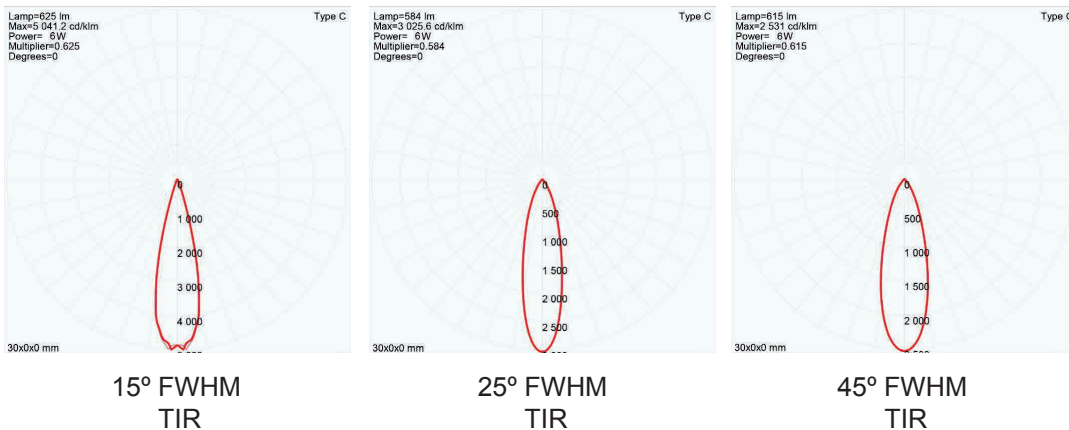


WIRING GUIDE

available for download: <http://www.hunzalighting.com/download.php>

Series/remote driver

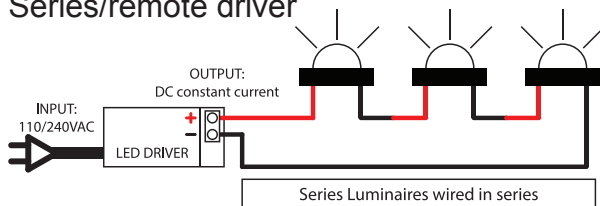

12v integral driver

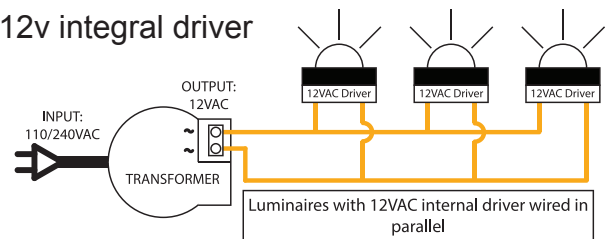

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

Specifications may change without notification

Aug 2017