


## Cube Wall Lite PURE LED

PROJECT:
TYPE:
SOURCE:
NOTES:

### SPECIFICATIONS



<b>LED Chip</b>	Cree XPG-3 Plug and Play field replaceable LED board
<b>Luminaire Output Per Head</b>	180 Lumens @ 1050mA, delivered from luminaire with unobstructed beam.
<b>Lumens Per Watt</b>	60 Lumens minimum @ 3 watts, delivered from luminaire with unobstructed beam
<b>CRI (3000K)</b>	90+
<b>Colour Temperatures</b>	2700K, 3000K, 4000K
<b>Beam Angles</b>	15, 25, 45
<b>Ingress Protection</b>	IP66
<b>Warranty</b>	Electronics = 5 years Body Aluminium = 5 years
<b>Standards</b>	AS/NZS 61046 cUL 1838, 2108, 1598 CSA 22.2 No. 250.7, No. 250.0-08, No. 250.0 CE

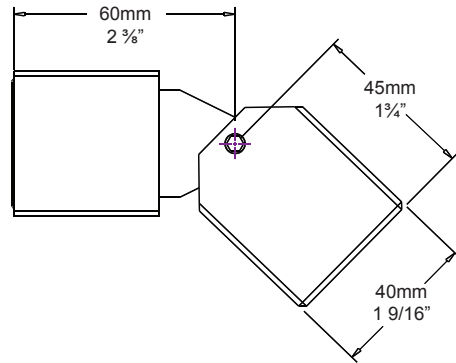

### PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. CWL/L

Luminaire	Power	Material/ Finish	Beam	Colour	Accessories
CWL/L					
S	SERIES, REMOTE DRIVER	<b>ALUMINIUM</b> EBK BLACK EBZ BRONZE EOGR OLIVE GREEN EWH WHITE EWB WHITE BIRCH EDG DARK GREY ESTAR SILVER STAR ECT CORTEN SS STAINLESS STEEL	15 15° 25 25° 45 45°	2 2700K 3 3000K 4 4000K	CJK CABLE JOINT KIT DM DUAL MOUNTING FIXED PLATE DMA DUAL MOUNTING ADJUSTABLE PLATE
<b>SERIES, REMOTE DRIVER REQUIRED:</b> Constant current driver Individual fixtures require 3vdc @ 1050mA maximum					

ADDITIONAL COMMENTS:

# LUMINAIRE CONSTRUCTION

**CNC machined from one of the following metals:**

**Aluminium:**

Body: High corrosion resistant 40mm (1½") x 40mm (1½") solid aluminium square bar.  
 Head: 40mm (1½") x 40mm (1½") solid aluminium square bar with chromate substrate and high UV resistant polyester powder coat.  
 Colours:  
 Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

**316 Stainless Steel:**

Body: 40mm (1½") x 40mm (1½") 316 stainless steel.  
 Head: 40mm (1½") x 40mm (1½") 316 stainless steel.

**Lens:**

Acrylic TIR lens.

**Mounting:**

The luminaire is mounted to the wall using two 5 gauge screws through a mounting disk.

**Luminaire Weight:**


Alum: 0.775kg (1lb 11oz)

## ACCESSORIES


## BEAM ANGLES

High efficiency PMMA TIR lenses. Field replaceable


IES files available for download: <http://www.hunzalighting.com/download.php>



15° FWHM TIR




25° FWHM TIR



45° FWHM TIR

## WIRING GUIDE


**Series/remote driver**

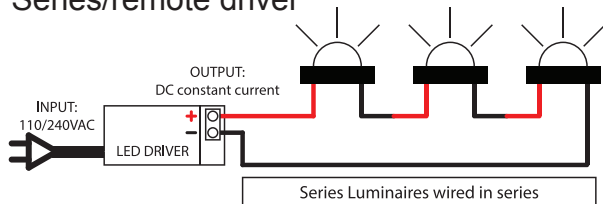

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

available for download: <http://www.hunzalighting.com/download.php>

**12v integral driver**

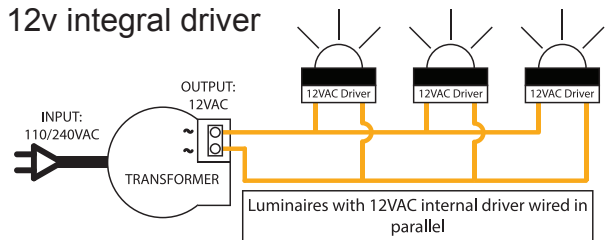

Specifications may change without notification

Aug 2017