



Euro Path Lite PURE LED


Cat. No. EPL(1-4)/L



270° Beam 360° Beam



180° Beam 2-90° Beam



PURE LED
Pure Performance

The Euro Path Lite PURE LED is ideal for lighting flat areas, 70mm decks, paved courtyards and edge lighting paths.


The Euro Path Lite PURE LED has a low profile and directs light horizontally via a stainless steel reflector cone through a frosted glass lens to reduce glare. Available with 1,2,3 or 4 facets for varying light effects. The dirt guard has been developed to prevent dirt, mud and grass clippings from entering the optics area. The Euro Path Lite PURE LED 2 facets may be used as a Step Lite in a wall or fence to shine light up and down.

The Hunza PURE LED system uses the latest CREE MTG-2 LED chips for maximum performance and long life. Power supply options include a choice of integral 12 volt driver or an external remote (series connection) driver. The PURE LED system incorporates an innovative Plug-and-Play system for easy replacement or upgrade of either the LED engine or integral driver in the field. A choice of a 2700K, 3000K or 4000K colour temperatures are available.

* At 350mA this fitting is the equivalent of a 25w halogen fitting.

* At 700mA this fitting is the equivalent of a 35w halogen fitting.

Ordering Information

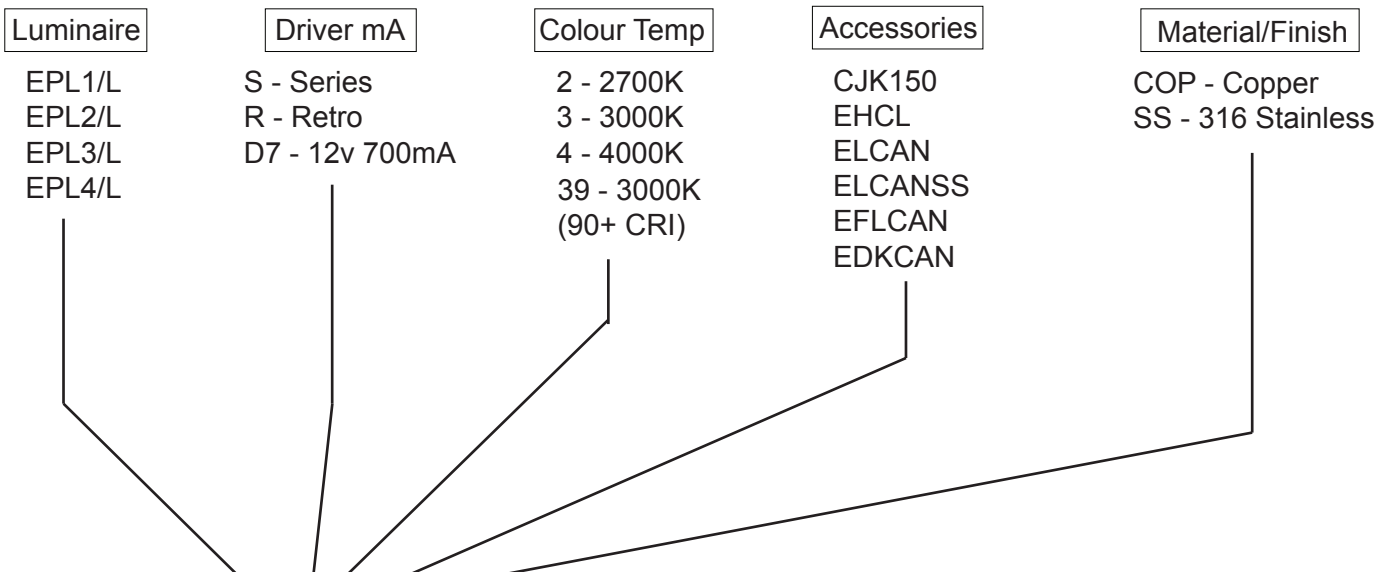

Ordering Example: EPL1/L S 3 CJK150 SS

HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2015 Hunza Holdings Ltd.

Luminaire Information

CNC machined from one of the following metals:

Copper

Body: 45mm (1¾") copper rod.
Flange: 70mm (2¾") copper rod.

Stainless Steel

Body: 45mm (1¾") 316 Stainless Steel rod.
Flange: 70mm (2¾") 316 Stainless Steel rod.

Luminaire Weight

Cop .600kg (1lb 5oz)
SS .510kg (1lb 2oz)

Mounting

Euro Floor Lite canister (see accessories) can be used for casting into concrete or a Euro Deck Lite canister for mounting into a wooden deck. Two screw holes in the flange can be specified if canisters are not required.

Features

Lens:

3mm frosted tempered flush fit shatter resistant glass.
Lifetime Warranty.

Gaskets:

Silicone, iron impregnated 220°c (428°f).

Accessories:

Cable Joint Kit (Cat. CJK150)
Euro Floor Canister (Cat. Eflcan)
Euro Deck Canister (Cat. Edkcan)
Euro Lite Canister (Cat. Elcan)
Euro Lite Canister 316 Stainless Steel (Cat. Elcanss)
Euro Hex Cell Louvre (Cat. EHCL)

Technical Information

Standards

AS/NZS 61046
IP56/IP66 UL 1838

LED

Cree MTG-2 Plug and Play, field replaceable LED board.
Lumen Output: 420 at 700mA
Lumens Per watt: 105 at 4 watts
CRI Warm White (3000k): 85+
Colour Temp: 2700K, 3000K and 4000K
High CRI Option (3000K): 90+ (lumen output decreases by 15%)

Power Supply

Series (External) Driver

Constant current driver
Output: 6vdc at 700mA maximum

Integral 12 Volt Driver

Hunza™ Plug and Play Driver
Input: 12vac, 5 watt total
Output: 6vdc nominal, 350 / 700mA

Transformer

Hunza™ Wall Mount Transformer for use with integral 12 volt driver

Retro 110/240 Volt Driver

Hunza™ Retro Driver
Input: 120/240vac, 5 watt total
Output: 6vdc, 700mA
0-10 volt dimming.
(USA - non dimming)