

Pole Spot ULTRA

PROJECT:

TYPE:

SOURCE:

NOTES:

SPECIFICATIONS



LED Chip	Cree CXA 2540 field replaceable LED board
Luminaire Output	5000 Lumens @ 1400 (52watts), Delivered from Luminaire with unobstructed beam.
Lumens Per Watt	90 Lumens minimum @ 52 watts, Delivered from Luminaire with unobstructed beam
CRI (3000K)	80 Standard, 90+ Optional
Colour Temperatures	2700K, 3000K, 4000K
Beam Angles	13, 22, 33, 51
Ingress Protection	IP66
Warranty	Electronics = 5 years Body Aluminium = 5 years
Standards	BS/EN 60598.2.2 cUL 1598 CE



PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. PS/U

Luminaire	Power	Material/ Finish	Beam	Colour	Accessories
<input type="text" value="PS/U"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<input type="text" value="PSFM/U"/>					
<p><small>Pole Flood flange mount</small></p>					
<input type="text" value="SR"/>	<input type="text" value="R"/>	<p>ALUMINIUM</p> <ul style="list-style-type: none"> <input type="text" value="EBK"/> BLACK <input type="text" value="EBZ"/> BRONZE <input type="text" value="EOGR"/> OLIVE GREEN <input type="text" value="EWH"/> WHITE <input type="text" value="EWB"/> WHITE BIRCH <input type="text" value="EDG"/> DARK GREY <input type="text" value="ESTAR"/> SILVER STAR <input type="text" value="ECT"/> CORTEN 	<ul style="list-style-type: none"> <input type="text" value="22"/> 22° <input type="text" value="33"/> 33° <input type="text" value="51"/> 51° <input type="text" value="13"/> 13° Requires Lens Ring extension 	<ul style="list-style-type: none"> <input type="text" value="2"/> 2700K <input type="text" value="3"/> 3000K <input type="text" value="4"/> 4000K <input type="text" value="39"/> 3000K, 90+ CRI 	<ul style="list-style-type: none"> <input type="text" value="HCL/U"/> HEX CELL LOUVER <input type="text" value="SNT/U"/> SNOOT <input type="text" value="GG/U"/> GLARE GUARD <input type="text" value="GS05"/> GLARE SHEILD <input type="text" value="LF"/> FROSTED LENS <input type="text" value="MC"/> MOUNTING CAGE <input type="text" value="CJK"/> CABLE JOINT KIT
<p>SERIES REMOTE: Constant current driver (included) Fixture require 37vdc @ 1400mA maximum</p> <p>RETRO 110-277vac DRIVER: Constant current driver (included) Input: 120,240,277 volts Output: 60 watts total 37vdc @ 1400mA 0-10 volt dimming</p>					
<p>Hunza Power Supply selection Chart Hunza Voltage drop Chart</p>					
<p>ADDITIONAL COMMENTS:</p> <div style="border: 1px solid black; height: 40px; width: 100%;"></div>					

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Body - solid high corrosion resistant 127mm (5") aluminium rod.
 Base - high corrosion resistant 127mm (5") x 3.18mm (1/8") aluminium tube.
 Finished with chromate substrate, Epoxy layer and a UV resistant polyester powder coat colour.
 Fixings and Mechanism - made from 316 Stainless Steel

Colours:

Black, Bronze, Silver Star, White, Birch, Olive Green, Dark Grey, Corten.

Step Lens:

12mm (1/2") Extra clear, low iron, shatter resistant glass.
 Lifetime warranty

Gaskets:

Silicone, iron impregnated 220°C (428°F)

Cable:

Water resistant rubber


Mounting:

Pole is set directly into concrete.
 For flange mounting please refer to the hunza website for mounting instructions.


Luminaire Weight:

5kg (11lbs)- Head only


ACCESSORIES




Glare Shield




Snoot



Glare Guard



Hex Cell Louvre




Mounting cage

BEAM ANGLES

High efficiency Reflectors. Feild replaceable


IES files available for download: www.hunzalighting.com/download.php

Lamp=4 999 lm
 Max=42 169.6 cd
 Power=61 W




13° FWHM REFLECTOR

Lamp=5 336 lm
 Max=20 451.9 cd
 Power=61 W




22° FWHM REFLECTOR

Lamp=5 411 lm
 Max=8 582.4 cd
 Power=61 W



33° FWHM REFLECTOR


Lamp=5 503 lm
 Max=7 010.6 cd
 Power=61 W

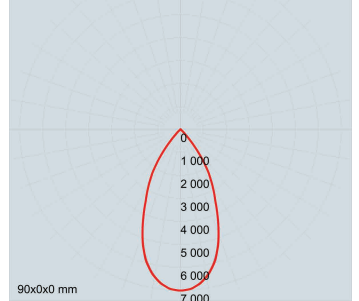


51° FWHM REFLECTOR

WIRING GUIDE

available for download: www.hunzalighting.com/download.php

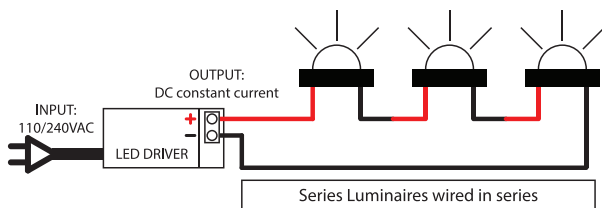

Series Luminaires wired in series

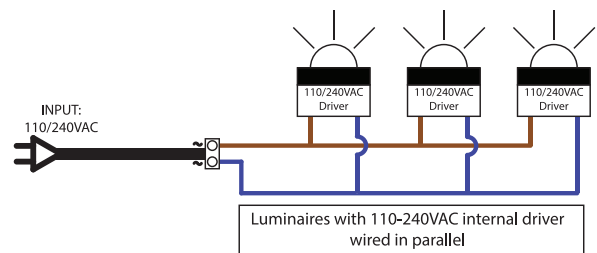

Luminaires with 110-240VAC internal driver wired in parallel

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country