


# Wall Spot

Cat. No. WS

Cat. No. WS/R

Cat. No. WSGU

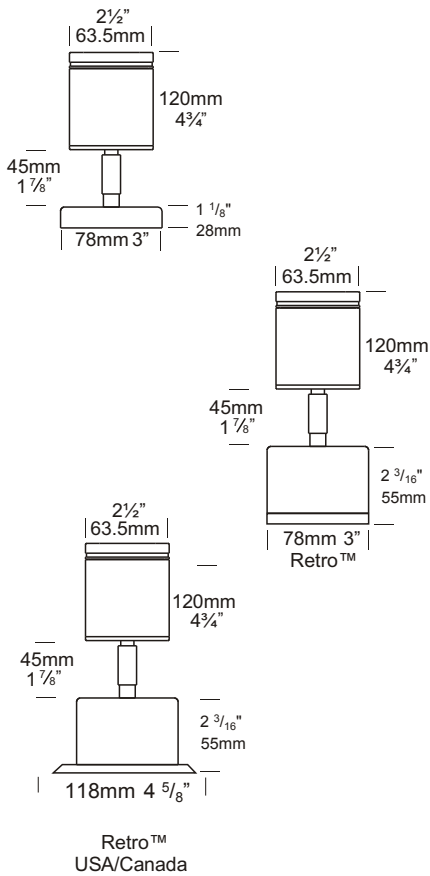

The Wall Spot has been designed to be mounted on walls and provide directional light for pathways and structural elements of a building. This luminaire has a fully adjustable head allowing 360 degree rotation and 0 - 90 degree elevation.

This luminaire is machined from a choice of 10mm solid aluminium with a UV stable powder coated finish, solid copper or 316 stainless steel with a clear, tempered, flush glass lens and high temperature silicon gaskets.

The Retro™ is a 110/240-12 ac mains option suited to an installation where mounting a transformer is a problem, e.g. a brick wall where there is only the cable protruding out of the wall and it is not an option to recess the transformer or when replacing an existing light fitting. The base size increases in size to accommodate the encapsulated IP66 dimmable transformer.

A GU10 version of this luminaire is also available for line voltage lamps. However, a longer body is needed to accommodate the longer lamp.

## Ordering Information

### Luminaire Type

WS - Wall Spot

### Material/Finish

BK - Black  
 BZ - Bronze  
 GN - Green  
 STAR - Silver Star  
 WH - White  
 WB - Birch  
 DG - Dark Grey  
 OG - Olive Green  
 RG - Beige  
 PR - Primrose  
 COP - Copper  
 SS - 316 Stainless Steel

### Accessories

CJK150 - Cable Joint Kit  
 LENSSTEPF - Frosted Lens  
 GG - Glare Guard  
 HCL - Hex Cell Louvre  
 /R - Retro™ Transformer  
 110/240-12 volt  
 WBAP - Wall Box Adaptor Plate  
 GU - GU10 Option



Ordering Example: WS BK - Wall Spot in Black  
 WS/R SS - Wall Spot Retro™ in 316 Stainless Steel  
 WSGU SS - Wall Spot GU10 in 316 Stainless Steel  
 (Accessories ordered separately)

**HUNZA**™ PURE  
 OUTDOOR  
 LIGHTING

**HUNZA FACTORY**  
 130 Felton Mathew Ave  
 Glen Innes  
 Auckland 1072  
 New Zealand

Ph: 64-9-528 9471  
 Fax: 64-9-528 9361  
 hunza@hunza.co.nz  
 www.hunza.co.nz

**INTERNATIONAL CONTACTS:**  
[www.hunza.co.nz/contacts.php](http://www.hunza.co.nz/contacts.php)

Specifications may change without notice.  
 Manufactured in New Zealand.  
 © 2011 Hunza Holdings Ltd.

Ver 1.4

## Luminaire Construction

CNC machined from the following metals:

**Body:** High corrosion resistant low copper 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") rod.

**Base & Mounting Plate (Retro™):** Cast from virgin high corrosion resistant CC401 low copper aluminium alloy chromate substrate and high UV resistant polyester powder coat - Black, Bronze, Green, Silver Star, White, Birch, Dark Grey, Olive Green, Beige, Primrose.

**Body:** Copper 63.5mm (2½") x 10mm (25/64). End cap - solid copper 63.5mm (2½") rod.

**Base:** Copper Hand spun 2mm (5/64").

**Mounting Plate:** Forged brass (Retro™).

**Body:** 316 Stainless Steel 63.5mm (2½") x 10mm (25/64) rod. End cap - 316 stainless steel 63.5mm (2½") rod.

**Base:** Investment cast and CNC machined.

**Mounting Plate:** Investment cast and CNC machined (Retro™).

## Mounting

12 volt: the luminaire is mounted to the wall using two 316 stainless screws through a shallow base 16mm (5/8") in depth. A Wall Box Adaptor Plate is available as an accessory to fit 3.0 and 4.0 Junction boxes for USA /Canada.

Retro™ luminaire (110/240-12volt): a mounting plate is fixed to the wall using two screws and the luminaire is fitted to the mounting plate.

## Features

**Lens:**

10mm (3/8") clear flush fit tempered shatter resistant glass.

Lifetime Warranty.

**Gasket:** Silicone, iron impregnated 220°C (428°F).

**Lamp Holders:**

GU5.3 & GU10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

**Accessories:**

Cable Joint Kit (Cat CJK150).

Not approved for USA /Canada.

Frosted Lens (Cat. LENSSTPEPF).

Glare Guard (Cat. GG).

Hex Cell Louvre Adaptor (Cat. HCL).


Retro™ transformer 110/240-12 volt (Cat. /R).

Wall Box Adaptor Plate (Cat. WBAP 12 volt luminaire USA/Canada). GU10 Option (Cat. GU).

**Swivels: Aluminium and Copper** luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

**Stainless Steel** luminaires - 360° rotation and 0 - 90° elevation, full stainless steel construction.

## Standards

IP66 AS/NZS61046  UL1838

## Luminaire Weight

12 volt

Alum .495kg (1lb 1oz)

Cop 1.300kg (2lb 13oz)

SS 1.080kg (2lb 6oz)

Retro™

Alum .900kg (1lb 15oz)

Cop 1.710kg (3lb 12oz)

SS 1.500kg (3lb 4oz)

## Power Supply

12 volt - HUNZA Inground or HUNZA Wall Mount Transformer: not included.

## USA and Canada:

HUNZA™ Wall Mount Transformer: not included. Approved for internal use.

## RETRO™

HUNZA™ 110/240-12 volt ac

potted electronic transformer

built into the Retro™ base. Dimmable with a suitable dimmer.

Approved for internal use.

**Luminaire: supplied with**










MR16 GU5.3 20 or 35 watt lamp max.

GU10 - GU10 25 or 35 watt lamp max.

## USA and Canada:

MR16 GU5.3 20 or 35 watt lamp max.

GU10 Halogen - Lamp not supplied



**HUNZA™** PURE OUTDOOR LIGHTING

**HUNZA FACTORY**  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

**Ph: 64-9-528 9471**  
**Fax: 64-9-528 9361**  
hunza@hunza.co.nz  
www.hunza.co.nz

**INTERNATIONAL CONTACTS:**  
www.hunza.co.nz/contacts.php

Specifications may change without notice.  
Manufactured in New Zealand.  
© 2011 Hunza Holdings Ltd.