

## Cube Bollard Cloak PURE LED

PROJECT:
TYPE:
SOURCE:
NOTES:


### SPECIFICATIONS



<b>LED Chip</b>	Cree XPG-3 Plug and Play field replaceable LED board
<b>Luminaire Output Per Head</b>	120 Lumens @ 700mA, 70 Lumens @ 350mA delivered from luminaire with unobstructed beam.
<b>Lumens Per Watt</b>	70 Lumens minimum @ 1 watt, 60 Lumens @ 2 watts delivered from luminaire with unobstructed beam.
<b>CRI (3000K)</b>	90+
<b>Colour Temperatures</b>	2700K, 3000K, 4000K, Amber, Blue, Green, Red
<b>Beam Angles</b>	Asymmetric
<b>Ingress Protection</b>	IP66
<b>Warranty</b>	Electronics = 5 years Body Aluminium = 5 years
<b>Standards</b>	AS/NZS 61046 cUL 1838, 2108 CSA 22.2 No. 250.7, No. 250.0-08, No. 250.0 CE




Flange Mount

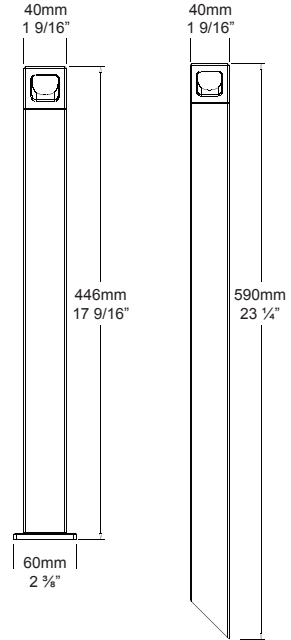

### PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. CBOLCL(1-4)/L

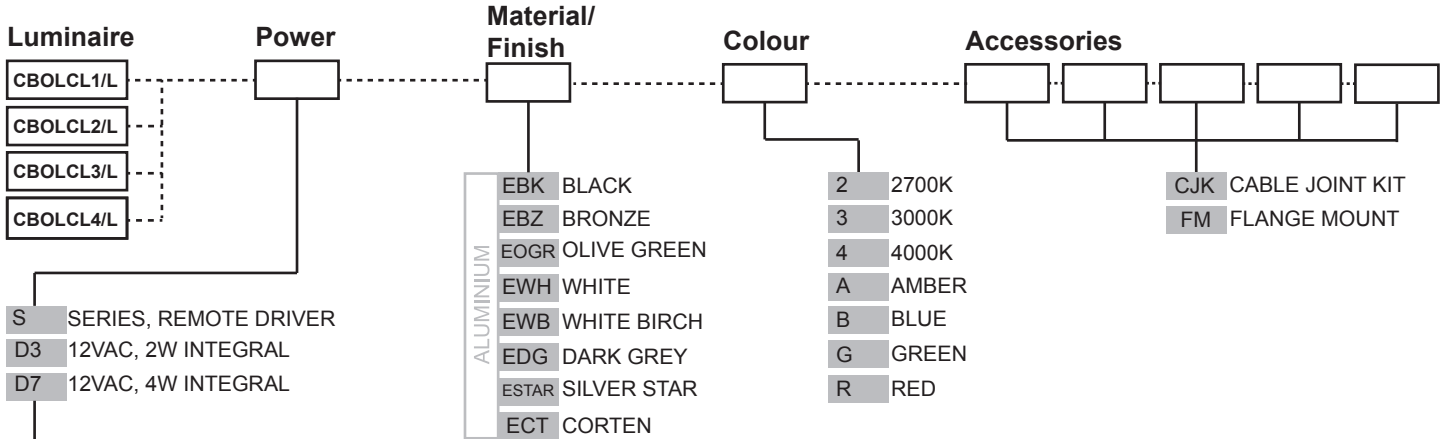

**SERIES, REMOTE DRIVER REQUIRED:**  
Constant current driver  
Individual fixtures require 3vdc @ 1050mA maximum

**12VAC INTEGRAL DRIVER:**  
Buckbullet driver (included)  
Input: 12VAC  
Output: 3vdc @ D3=350mA, D7=700mA

# LUMINAIRE CONSTRUCTION

**CNC machined from one of the following**

**metals:**

**Aluminium:**

Pole: High corrosion resistant 40mm (1½") x 4mm (3/16") aluminium square tube.

Head: 40mm (1½") x 40mm (1½") solid aluminium square bar, with chromate substrate and high UV resistant polyester powder coat.

**Colours:**

Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

**Lens:**

Acrylic lens.

**Do not** clean with petrochemical substances.

**Gaskets:**

Silicone, iron impregnated 220°C (428°F)

**Mounting:**

Set in concrete in the ground or specify with flange mount option, which bolts to concrete, tiling or wooden decks.

**Luminaire Weight:**

Alum: 0.500kg (1lb 2oz)

---

## ACCESSORIES

---


## BEAM ANGLES

IES files available for download: [hunzalighting.com/downloads](http://hunzalighting.com/downloads)

---

## WIRING GUIDE


Series/remote driver

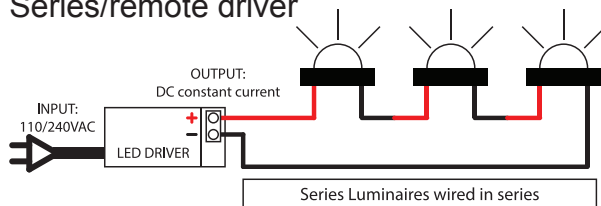

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

Available for download: [hunzalighting.com/downloads](http://hunzalighting.com/downloads)

12v integral driver

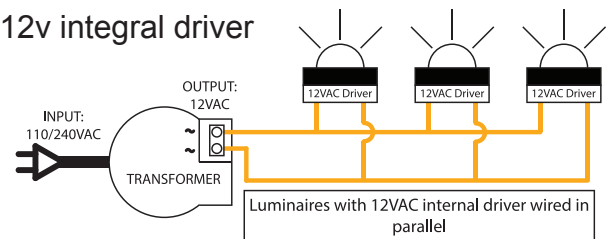

Specifications may change without notification

Aug 2017

**HUNZA**™ PURE OUTDOOR LIGHTING

**HUNZA FACTORY** 130 Felton Mathew Ave  
Saint Johns  
Auckland 1072  
New Zealand

Ph: +64-9-528 9471  
Fax: +64-9-528 9361  
hunza@hunza.co.nz  
[www.hunzalighting.com](http://www.hunzalighting.com)

**INTERNATIONAL CONTACTS:**  
<http://www.hunzalighting.com/contact.php>

This document contains proprietary information of Hunza. Its receipt or possession does not convey any rights to reproduce or disclose its content.