


Cube Pole Spot PURE LED

PROJECT:
TYPE:
SOURCE:
NOTES:

SPECIFICATIONS



LED Chip	Cree XPG-3 Plug and Play field replaceable LED board
Luminaire Output Per Head	200 Lumens @ 700mA, delivered from luminaire with unobstructed beam.
Lumens Per Watt	67 Lumens minimum @ 1 watt, delivered from luminaire with unobstructed beam
CRI (3000K)	90+
Colour Temperatures	2700K, 3000K, 4000K, Amber, Blue, Green, Red
Beam Angles	15, 25, 45
Ingress Protection	IP66
Warranty	Electronics = 5 years Body Aluminium = 5 years
Standards	AS/NZS 61046 cUL 1838, 2108 CSA 22.2 No. 250.7, No. 250.0-08, No. 250.0 CE

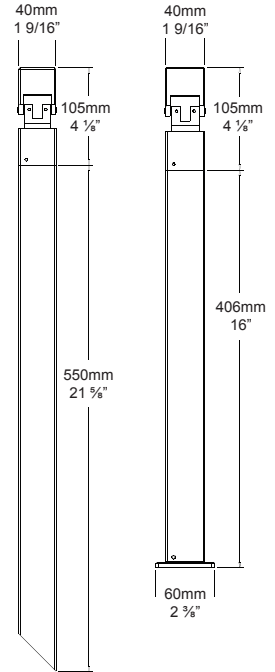

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. CPS/L

Luminaire	Power	Material/Finish	Beam	Colour	Accessories
CPS/L					
S SERIES, REMOTE DRIVER D3 12VAC, 2W INTEGRAL D7 12VAC, 4W INTEGRAL		ALUMINIUM EBK BLACK EBZ BRONZE EOGR OLIVE GREEN EWH WHITE EWB WHITE BIRCH EDG DARK GREY ESTAR SILVER STAR ECT CORTEN	15 15° 25 25° 45 45°	2 2700K 3 3000K 4 4000K A AMBER B BLUE G GREEN R RED	CJK CABLE JOINT KIT FM FLANGE MOUNT
SERIES, REMOTE DRIVER REQUIRED: Constant current driver Individual fixtures require 3vdc @ 1050mA maximum 12VAC INTEGRAL DRIVER: Buckbullet driver (included) Input: 12VAC Output: 3vdc @ D3=350mA, D7=700mA					

LUMINAIRE CONSTRUCTION

CNC machined from one of the following

metals:

Aluminium:

Pole: High corrosion resistant 40mm (1½") x 4mm (3/16") aluminium square tube.

Head: 40mm (1½") x 40mm (1½") solid aluminium square bar, with chromate substrate and high UV resistant polyester powder coat.

Colours:

Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

Lens:

Acrylic TIR lens.

Do not clean with petrochemical substances.

Gaskets:

Silicone, iron impregnated 220°C (428°F)

Mounting:

Set in concrete in the ground or specify with flange mount option, which bolts to concrete, tiling or wooden decks.


Luminaire Weight:

Alum: 0.500kg (1lb 2oz)

ACCESSORIES

BEAM ANGLES


IES files available for download: hunzalighting.com/downloads

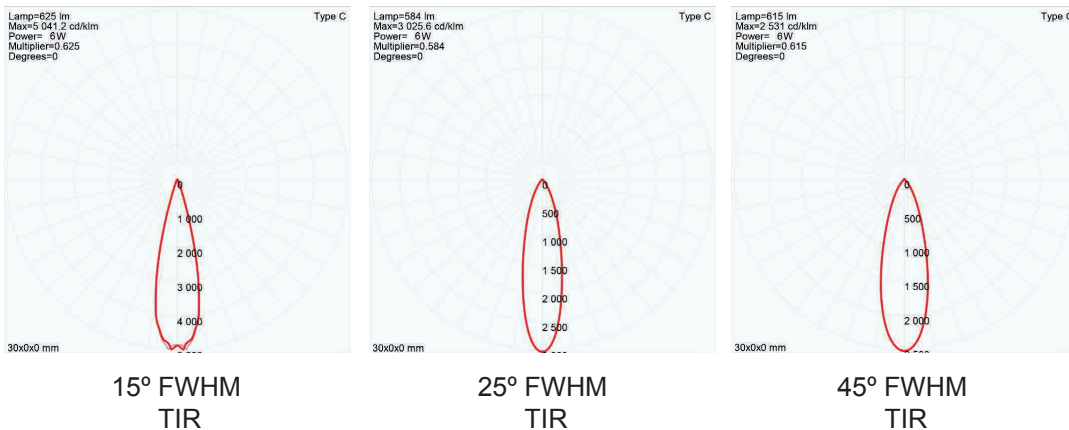


WIRING GUIDE

Available for download: hunzalighting.com/downloads

Series/remote driver

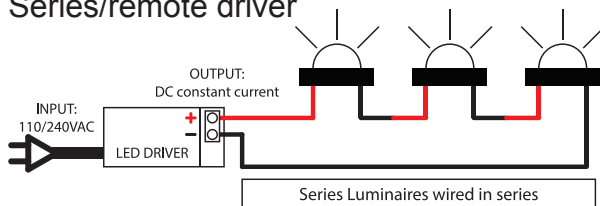

12v integral driver

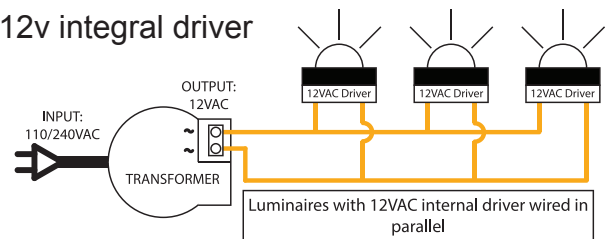

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

Specifications may change without notification

Aug 2017

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY 130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: +64-9-528 9471
Fax: +64-9-528 9361
hunza@hunza.co.nz
www.hunzalighting.com

INTERNATIONAL CONTACTS:
<http://www.hunzalighting.com/contact.php>

This document contains proprietary information of Hunza. Its receipt or possession does not convey any rights to reproduce or disclose its content.