



# Flush Floor Lite

Cat. No. FFLSP

Cat. No. FFLSPGU

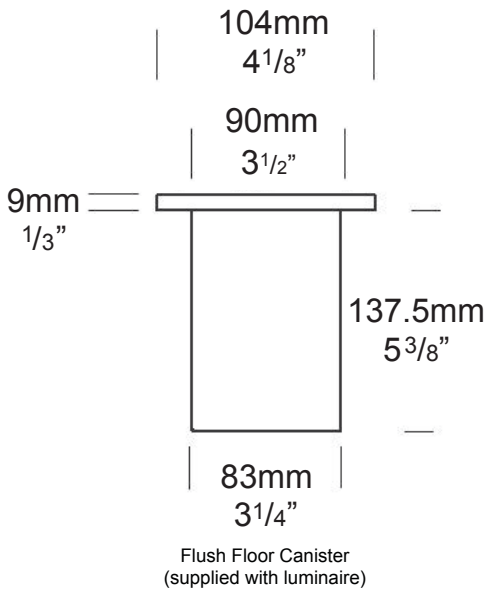

The Flush Floor Lite has been designed to mount flush with the level of a pathway, hotel floor or a building foyer. The 'Flush Fit' lens stops water pooling and depositing dirt on the lens. There is no lip to trip over and the luminaire can be driven over or walked upon without being damaged.

A GU10 version of this luminaire is also available for line voltage lamps.

A mounting canister is included for easy installation.

## Ordering Information

Luminaire Type	Material	Accessories
FFLSP - Flush Floor Lite Spot	COP - Copper	CJK150 - Cable Joint Kit
FFLSPGU - Flush Floor Lite Spot GU10	SS - Stainless Steel	HCL - Hex Cell Louvre
		LENSSTEPF - Frosted Lens

Ordering Example: FFLSP SS - Flush Floor Lite Spot in Stainless Steel  
 FFLSPGU COP - Flush Floor Lite Spot GU10 in Copper  
 HCL - Hex Cell Louvre  
 (accessories ordered separately)

**HUNZA**™ PURE  
OUTDOOR  
LIGHTING

**HUNZA FACTORY 130**  
 Felton Mathew Ave  
 Glen Innes  
 Auckland 1072  
 New Zealand

Ph: 64-9-528 9471 Fax:  
 64-9-528 9361  
 hunza@hunza.co.nz  
 www.hunzalighting.com

**INTERNATIONAL CONTACTS:**  
[www.hunzalighting.com/contact.php](http://www.hunzalighting.com/contact.php)

Specifications may change without notice.  
 Manufactured in New Zealand.  
 © 2016 Hunza Holdings Ltd.

Ver 1.4

## Luminaire Construction

**CNC machined from one of the following materials**

### Copper

Body: 63.5mm (2½") x 10mm (3/8") copper tube.

End cap: 63.5mm (2½") solid copper rod.

Inner Flange: 90mm (3½") solid copper rod.

Canister Flange: solid copper 104mm (4").

Canister: PVC canister 137.5 (5½") x 3mm (1/8").

### 316 Stainless Steel

Body: 63.5mm (2½") x 10mm (3/8") stainless steel tube.

End cap: 63.5mm (2½") solid stainless steel rod.

Inner Flange: 90mm (3½") solid stainless steel rod.

Canister Flange: solid stainless steel 104mm (4").

Canister: PVC canister 137.5 (5½") x 3mm (1/8").

## Features

### Lens

10mm (3/8") clear tempered shatter resistant glass.

### Gasket

Silicone, iron impregnated 220°C (428°F)

### Lamp Holders

MR16 & GU10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) Teflon cables.

## Accessories

**Cable Joint Kit** (Cat. CJK150). Not approved for USA/Canada.

**Frosted Lens** (Cat. LENSSTEPF).

**Hex Cell Louvre** (Cat. HCL).

## Mounting

The luminaire is pushed into the canister and is held in by a silicone "O" ring. The canister is cast into concrete, brick, tiles, etc.

Maximum driver over speed - 10km/h (6mph).

Maximum vehicle weight - 1500kg (3300lbs).

## Standards

EN60598, IP67, UL1838, 

## Luminaire Weight

**Copper** - 1.700kg (3lb 12oz)

**Stainless Steel** - 1.500kg (3lb 5oz)

## Power Supply

Hunza Inground or Wall Mount Transformer: not included.

### USA and Canada

Hunza Wall Mount Transformer: not included.

## Lamp Options










MR16 - 20, 35 or 50 watt lamp max.

GU10 - 10, 25 or 35 watt lamp max.

### USA and Canada

MR16 - 20, 35 or 50 watt lamp max.

GU10 - lamp not supplied.

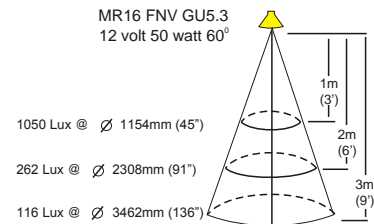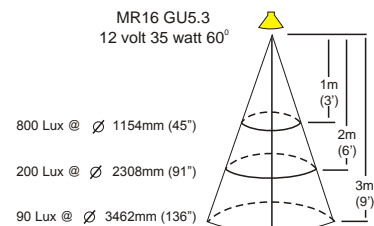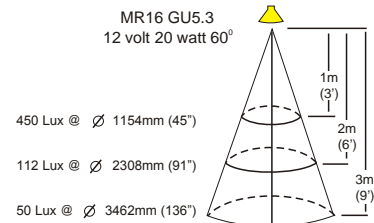

**HUNZA**™ PURE OUTDOOR LIGHTING

**HUNZA FACTORY**  
130 Felton Mathew  
Ave Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunzalighting.com

**INTERNATIONAL CONTACTS:**  
www.hunzalighting.com/contact.php

Specifications may change without notice.  
Manufactured in New Zealand.  
© 2016 Hunza Holdings Ltd.

Ver 1.4