

ARCH BOLLARD INSTALLATION INSTRUCTIONS

NOTE: THESE INSTRUCTIONS MUST NOT CONTRAVENE YOUR LOCAL ELECTRICAL AUTHORITY REGULATIONS, WITH WHICH ALL INSTRUCTIONS HERE IN MUST COMPLY. PLEASE KEEP INSTRUCTIONS FOR FUTURE REFERENCE.

Remove the complete fixture from the packaging. If the Pole and

Discard the packing in an environmentally friendly way.

We recommend casting the Pole into the ground with concrete to a minimum depth of 300mm (12"). Place drainage material in the bottom of the hole to drain away water and stop water level build up. (See Fig. 1).

Once ground works are complete and the pole is set in place. Draw supply cable through Pole allowing an extra 200mm (8") minimum of cable above the top of the pole. Now make a waterproof connection to the luminaire input cable.

For the best optic performance we recommend to install the head of the luminaire at 1200mm (4 feet) above the ground.

If 0-10V dimming is being used draw dimming cable up through the pole and connect to purple and grey dimming wires on the driver.

(See Fig.2).

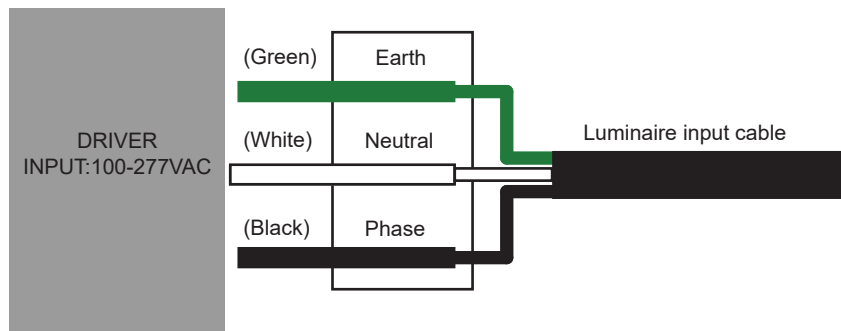


Fig.2.

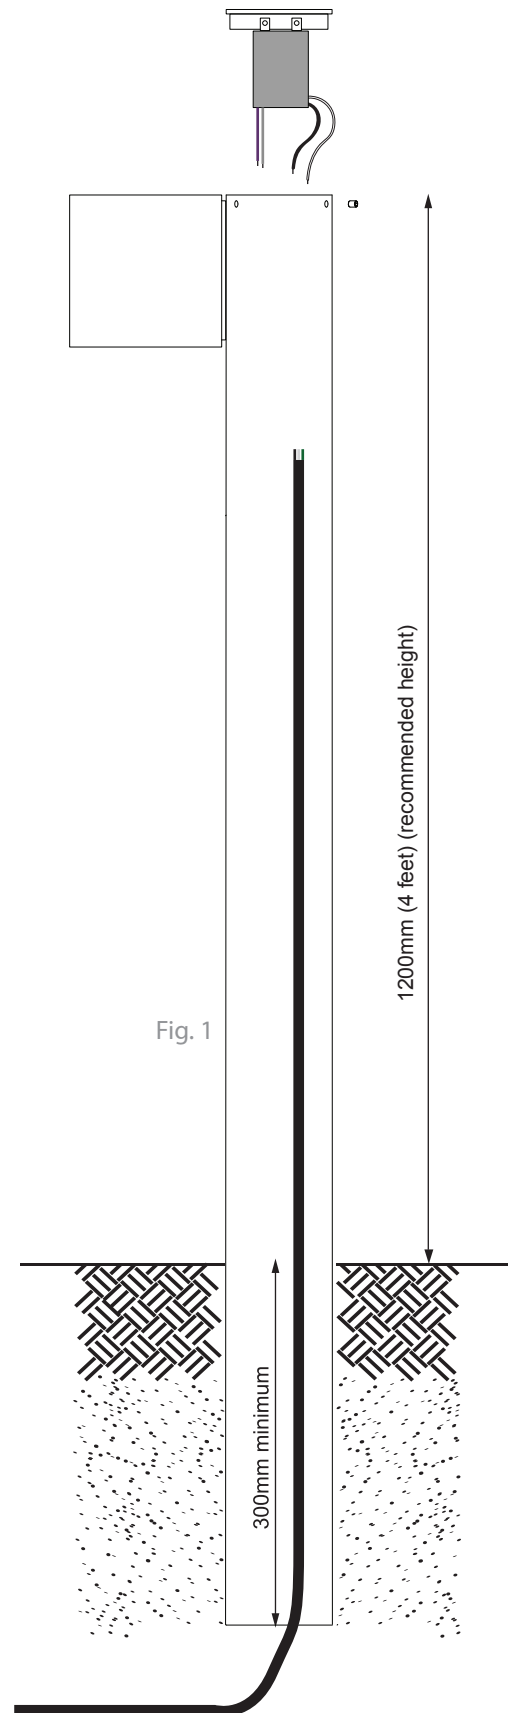
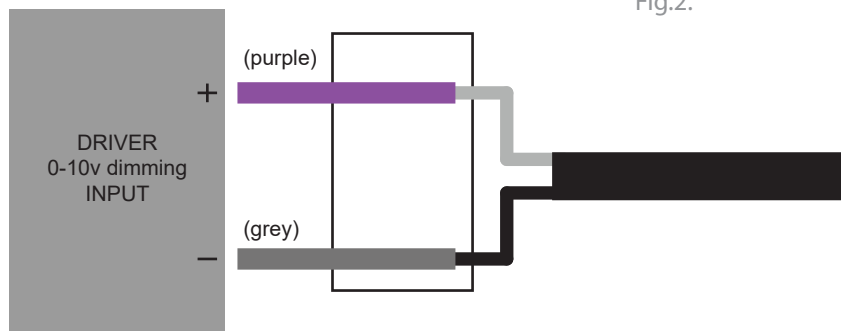


Fig. 1

Finish installation by securing the Luminaire Cap to the top of the pole with Grub screws provided.

DO NOT water blast/jet wash this fixture under any circumstance.