


PROJECT:
TYPE:
SOURCE:
NOTES:

### SPECIFICATIONS



<b>LED Chip</b>	Cree XPG-3 field replaceable LED board
<b>Luminaire Output (per end)</b>	1200 lumens @ 1050mA (15 watts), delivered from luminaire with unobstructed beam.
<b>Lumens Per Watt</b>	1200 lumens minimum @ 15 watts, delivered from luminaire with unobstructed beam
<b>CRI (3000K)</b>	90+ Standard
<b>Colour Temperatures</b>	2700K, 3000K, 4000K
<b>Beam Angles</b>	15, 25, 45
<b>Ingress Protection</b>	IP66
<b>Warranty</b>	Electronics = 5 years Body Aluminium = 5 years
<b>Standards</b>	BS/EN 60598.2.2 cUL 1598 CE

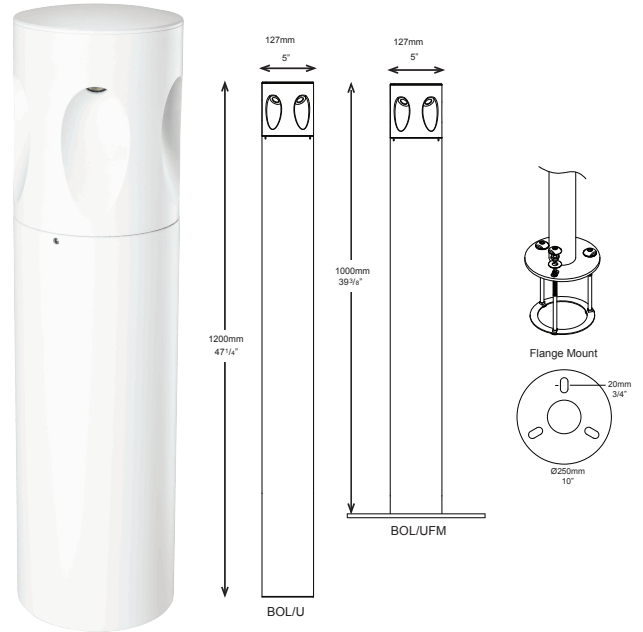


\*custom pole lengths range from 1500mm (6') to 2000mm (6ft 8")

### PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. BOL/U

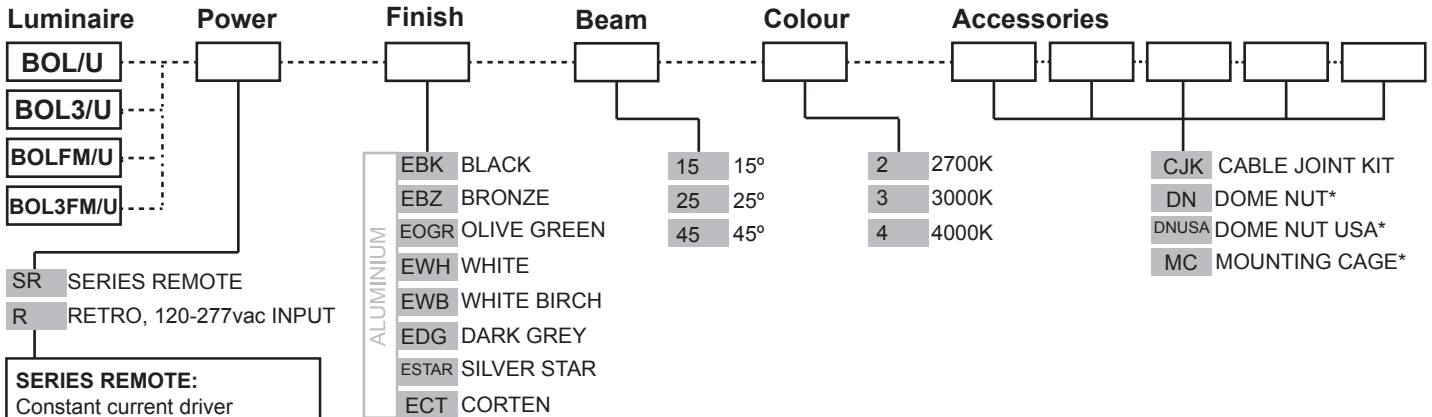

**SERIES REMOTE:**  
Constant current driver (included). Fixture require 15vdc @ 1050mA maximum. 0-10 volt dimming.

**RETRO 110-277vac DRIVER:**  
Constant current driver (included). Input: 120, 240, 277 volts. Output: 18 watts total 15vdc @ 1050mA 0-10 volt dimming.

\*Only available for Flange Mount version

ADDITIONAL COMMENTS:

# LUMINAIRE CONSTRUCTION

## CNC machined from one of the following metals:

Head - solid high corrosion resistant 127mm (5") aluminium rod.  
End cap - high corrosion resistant 127mm (5") x 3.18mm (1/8") aluminium tube.  
Pole - 127mm (5") aluminium tube with chromate substrate, finished with an Epoxy layer and a UV resistant polyester powder coat colour.

## Colours:

Black, Bronze, Silver Star, White, Birch, Olive Green, Dark Grey, Corten.

## Lens:

TIR lens with lifetime warranty.

## Gaskets:

Silicone, iron impregnated 220°C (428°F).

## Cable:

Water resistant rubber.


## Mounting:

Pole is set directly into concrete.  
For flange mounting please refer to the Hunza website for mounting instructions.  
Dome Nut - for use with M12 J-bolts.  
Dome Nut USA - for use with 1/2" UNC 13 TPI J-bolts.

## Luminaire Weight:


4kg (8lbs 13oz)

## ACCESSORIES



Dome Nut

(for use with M12 J-bolts or 1/2" UNC 13 TPI J-bolts)




Mounting cage

## BEAM ANGLES

High efficiency Reflectors. Field replaceable

IES files available for download: [hunzalighting.com/downloads](http://hunzalighting.com/downloads)


## WIRING GUIDE

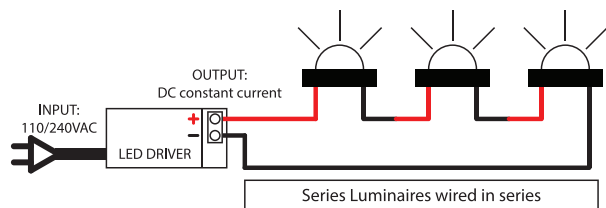

Series Luminaires wired in series

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

Available for download: [hunzalighting.com/downloads](http://hunzalighting.com/downloads)

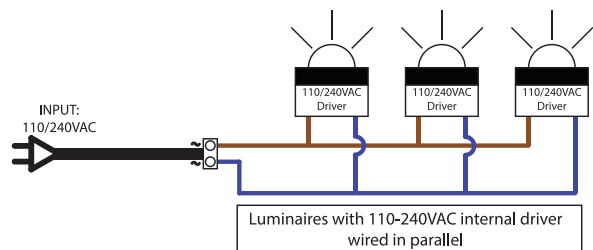

Luminaires with 110-240VAC internal driver wired in parallel