


PROJECT:
TYPE:
SOURCE:
NOTES:

### SPECIFICATIONS




<b>LED Chip</b>	Cree XPG-3 X 12 replaceable linear board
<b>Luminaire Output</b>	2300 Lumens @ 700mA (26 watts), Delivered from Luminaire with 3000K unobstructed beam.
<b>Lumens Per Watt</b>	85 Lumens minimum @ 26 watts, Delivered from Luminaire with 3000K unobstructed beam
<b>CRI (3000K)</b>	90+ Standard
<b>Colour Temperatures</b>	2700K, 3000K, 4000K, Blue, Amber
<b>Beam Angles</b>	15, 30, 60, 35x15
<b>Ingress Protection</b>	IP68 <i>*not for use in pool or ponds</i>
<b>Warranty</b>	Electronics = 5 years Body Aluminium = 5 years
<b>Standards</b>	BS/EN 60598.2.2 CE

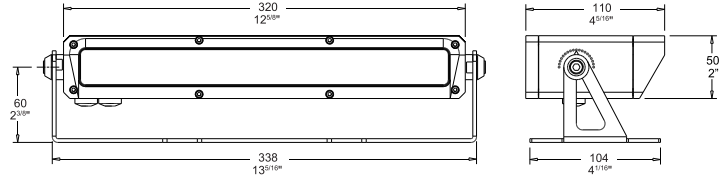

### PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. BLD/L

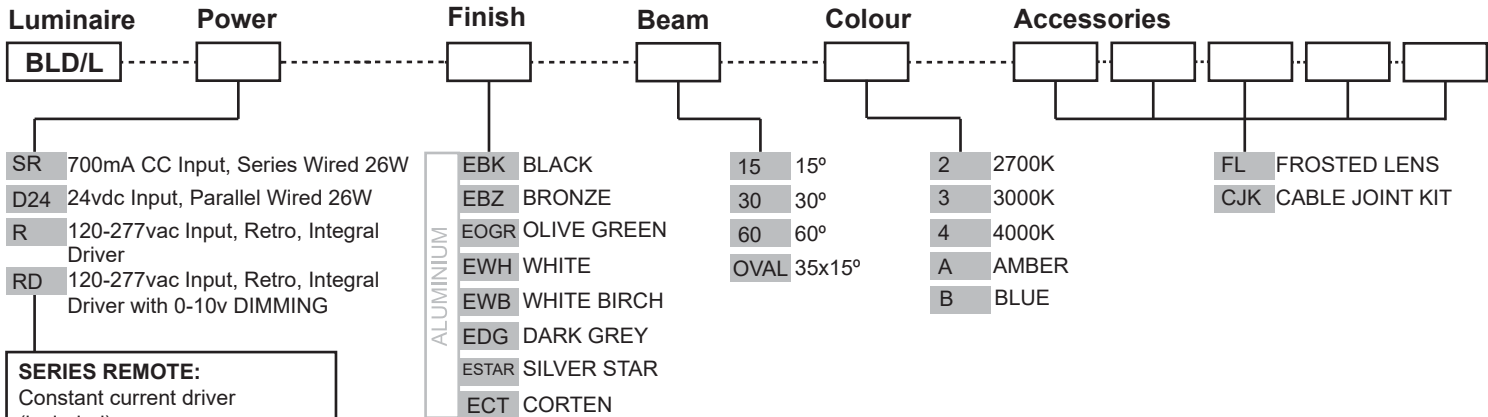

**SERIES REMOTE:**  
Constant current driver (included)  
Fixture requires 37vdc @ 700mA maximum

**24vdc DRIVER:**  
Constant current driver (included)  
Fixture requires 24vdc constant voltage

**RETRO & RETRO DIMMING:**  
**110-277vac DRIVER:**  
Constant current driver (included)  
Input: 120,240,277 volts  
Output: 30 watts total  
37vdc @ 700mA  
0-10 volt dimming (RD option)

ADDITIONAL COMMENTS:

# LUMINAIRE CONSTRUCTION

**CNC machined from one of the following metals:**

Body - solid high corrosion resistant 50 x 75mm (2 x 3") aluminium bar.  
 Finished with chromate substrate, Epoxy layer and a UV resistant polyester powder coat colour.  
 Fixings and Brackets - made from 316 Stainless Steel

**Step Lens:**

10mm (3/8") Extra clear, low iron, shatter resistant glass.  
 Lifetime warranty

**Gaskets:**

Silicone, iron impregnated 220°C (428°F)

**Cable:**

Water resistant rubber

**Mounting:**

The mounting bracket is fixed to the surface using stainless screws.

**Luminaire Weight:**

4kg (9 lbs)

**Colours:**


Black, Bronze, Silver Star, White, Birch, Olive Green, Dark Grey, Corten.

## ACCESSORIES


## BEAM ANGLES

High efficiency Optics. Field replaceable


IES files available for download: [www.hunzalighting.com/download.php](http://www.hunzalighting.com/download.php)

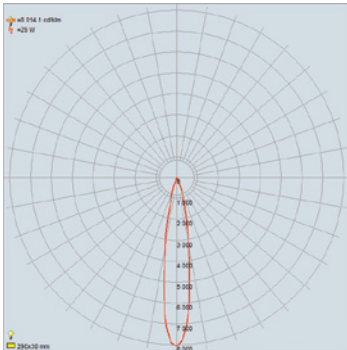


15° FWHM OPTIC

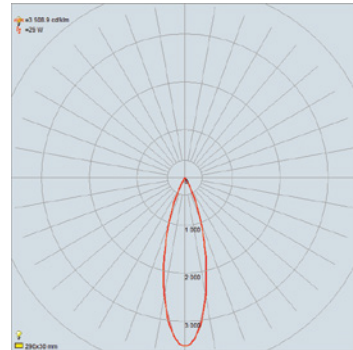

30° FWHM OPTIC

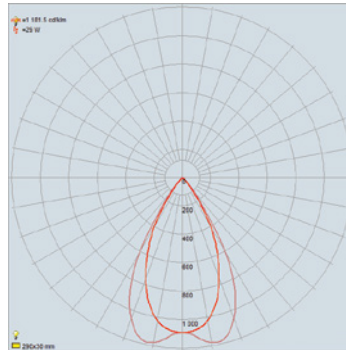




60° FWHM BATWING OPTIC

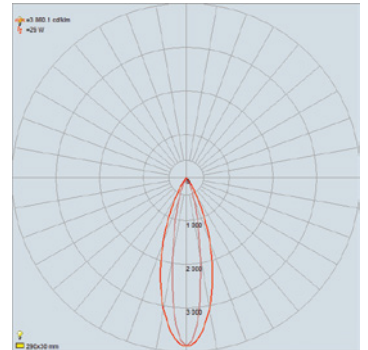

35 x 15° OVAL FWHM OPTIC

## WIRING GUIDE

available for download: [www.hunzalighting.com/download.php](http://www.hunzalighting.com/download.php)

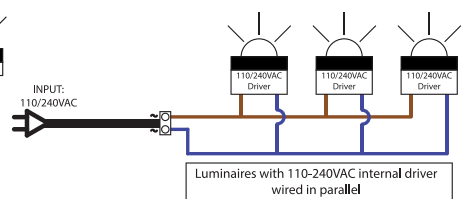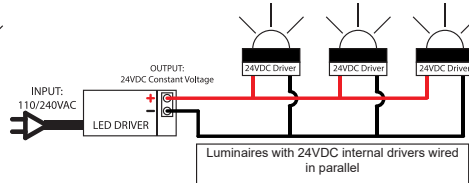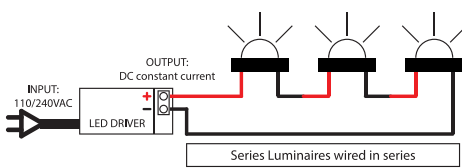

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country