

Cube Pole Spot PURE LED

PROJECT:
TYPE:
SOURCE:
NOTES:

SPECIFICATIONS




LED Chip	Cree XPG-3 Plug and Play field replaceable LED board
Luminaire Output Per Head	200 Lumens @ 700mA, delivered from luminaire with unobstructed beam.
Lumens Per Watt	67 Lumens minimum @ 1 watt, delivered from luminaire with unobstructed beam
CRI (3000K)	90+
Colour Temperatures	2700K, 3000K, 4000K, Amber, Blue, Green, Red
Beam Angles	15, 25, 45
Ingress Protection	IP66
Warranty	Electronics = 5 years Body Aluminium = 5 years
Standards	AS/NZS 61046 cUL 1838, 2108 CSA 22.2 No. 250.7, No. 250.0-08, No. 250.0 CE



Flange Mount


*Custom pole lengths available

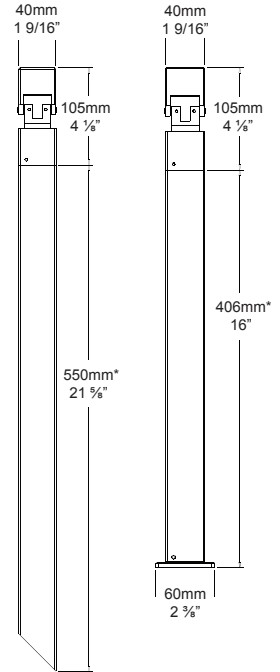

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. CPS/L

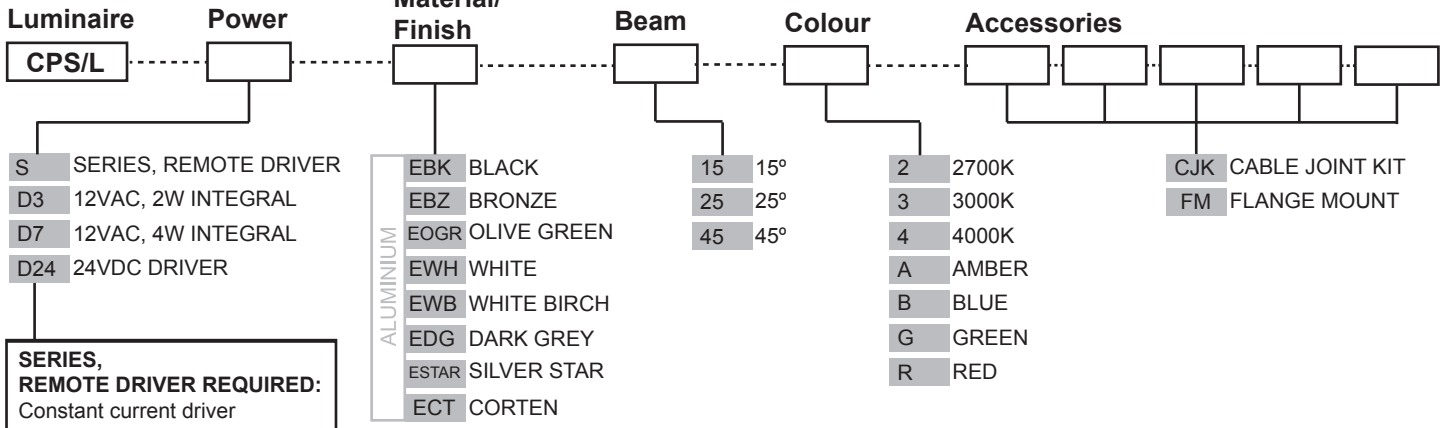

SERIES, REMOTE DRIVER REQUIRED:
Constant current driver
Individual fixtures require 3vdc @ 1050mA maximum

12VAC INTEGRAL DRIVER:
Buckbullet driver (included)
Input: 12VAC
Output: 3vdc @ D3=350mA, D7=700mA

24VDC DRIVER:
Input: 24vdc.
Output: 18vdc @ 700mA constant current (non dimming).
Note: not for USA.

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Aluminium:

Pole: High corrosion resistant 40mm (1½") x 4mm (3/16") aluminium square tube.
 Head: 40mm (1½") x 40mm (1½") solid aluminium square bar, with chromate substrate and high UV resistant polyester powder coat.

Colours:

Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

Lens:

Acrylic TIR lens.

Do not clean with petrochemical substances.

Gaskets:

Silicone, iron impregnated 220°C (428°F)

Mounting:

Set in concrete in the ground or specify with flange mount option, which bolts to concrete, tiling or wooden decks.


Luminaire Weight:

Alum: 0.500kg (1lb 2oz)

ACCESSORIES

BEAM ANGLES

IES files available for download: hunzalighting.com/downloads

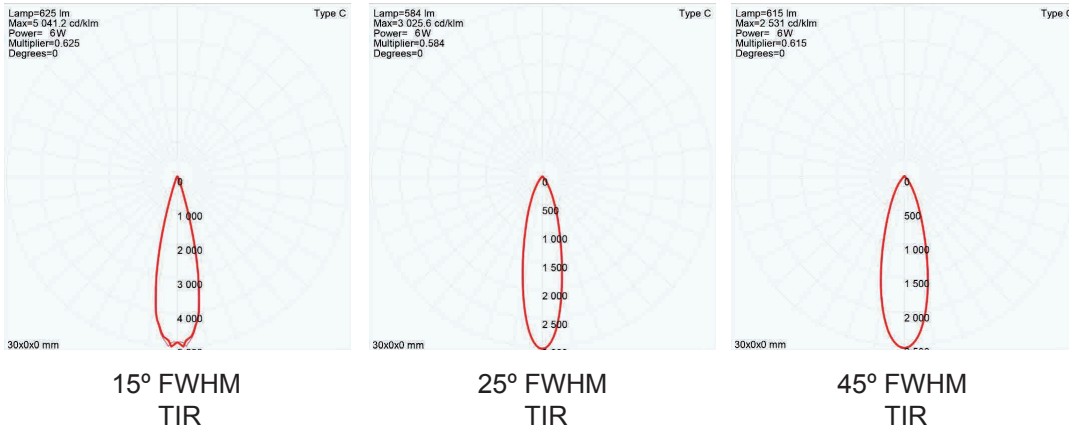


WIRING GUIDE

Available for download: hunzalighting.com/downloads

Series/remote driver

12v integral driver

24vdc integral driver

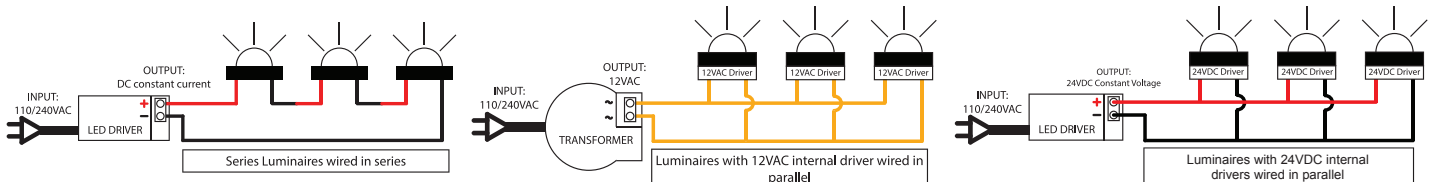

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

Specifications may change without notification

Aug 2017