

PROJECT:
TYPE:
SOURCE:
NOTES:

### PURELED SPECIFICATIONS




<b>LED Chip</b>	Cree XHP-50-2 Plug and Play field replaceable LED board
<b>Luminaire Output</b>	600 Lumens @ 1050mA (6 watts), 420 Lumens @ 700mA (4 watts), 240 Lumens @ 350mA (2 watts), delivered from luminaire with unobstructed beam.
<b>Lumens Per Watt</b>	100 Lumens @ 6 watts minimum, delivered from luminaire with unobstructed beam
<b>CRI (3000K)</b>	90+
<b>Colour Temperatures</b>	2700K, 3000K, 4000K
<b>Beam Angles</b>	15, 25, 38, 60
<b>Ingress Protection</b>	IP68
<b>Warranty</b>	Electronics = 5 years Body Stainless Steel = 5 years
<b>Standards</b>	AS1939, UL676 (12 volt only)



Pool Lite PVC Canister




Pool Lite PVC Canister 100mm



### PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. POOL/L

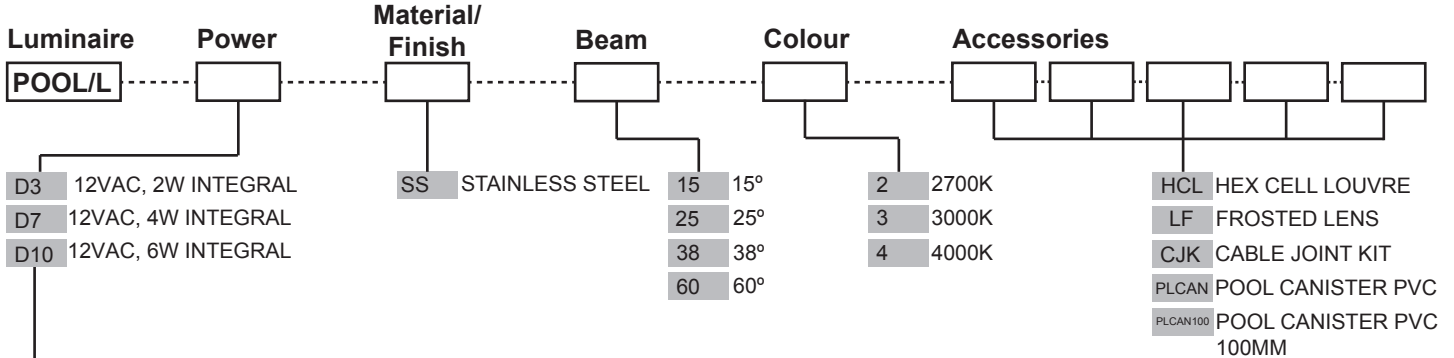

#### 12VAC INTEGRAL DRIVER:

Hunza integrated plug and play driver (included)  
Input: 9-15VAC.  
Output: 6vdc @ D3=350mA, D7=700mA, D10=1050mA (1050mA limited to ≤ 40°C (104°F) ambient temperature in stainless steel)

#### OTHER LAMP OPTIONS:

POOL/H - MR16 Halogen 12V Lamp  
POOL/SL - MR16 LED Retrofit 12V Lamp (lamps vary by market - please refer to supplier for details)

[Click here for halogen specification sheet](#)

[Click here for 240v Remote Power Supply Guidance Charts](#)

[Click here for USA Remote Power Supply Guidance Charts](#)

# LUMINAIRE CONSTRUCTION

**CNC machined from one of the following metals:**

**316 Stainless Steel:**

Body: 63.5mm (2 1/2") x 9mm (3/8").  
End cap: solid 316 stainless steel 63.5 (2 1/2") rod, electro polished to increase corrosion protection by up to 33%.

**Canister:**

CNC machined from engineering grade PVC with moulded PVC end cap which has 20mm (3/4") conduit entry for electrical connections.

**Lens:**

10mm (3/8") extra clear, low iron, shatter resistant glass.  
Lifetime warranty.

**Gaskets:**

Silicone, iron impregnated 220°C (428°F).

**Mounting:**

The PVC mounting canister is suitable for installation into three different types of pool wall. Fibre glass pools, existing concrete pools and new concrete pools.

**Cable:**


Standard 6 meters  
Water resistant rubber

**Luminaire Weight:**

SS: 1.885kg (4lb 2oz)

*WARNING - out of balance pool chemicals may cause the luminaire to corrode at a rapid rate. In salt water an increase in water temperature of 10 degrees will double the corrosion factor. 316 stainless steel is suitable for situations of up to 1000 parts per million of chloride. Where an automatic chlorinator is employed an excess amount of chlorine may be produced. The Hunza Pool Lite is electro polished to increase corrosion protection.*

## ACCESSORIES




Hex Cell Louvre

## BEAM ANGLES

High efficiency PMMA TIR lenses. Field replaceable

IES files available for download: [hunzalighting.com/downloads](http://hunzalighting.com/downloads)


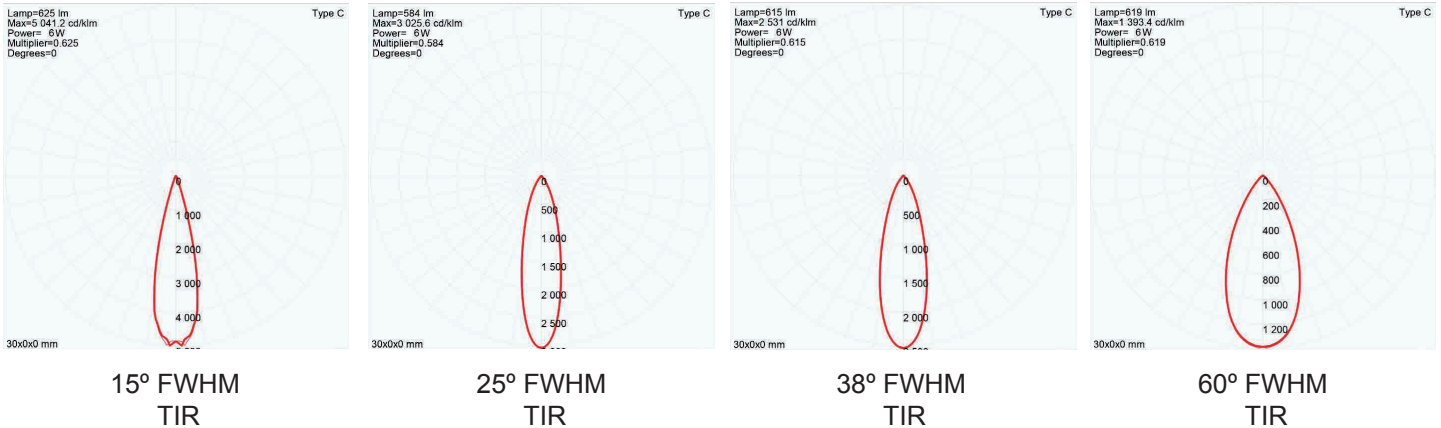


## WIRING GUIDE

Available for download: [hunzalighting.com/downloads](http://hunzalighting.com/downloads)

12v integral driver

24vdc integral driver

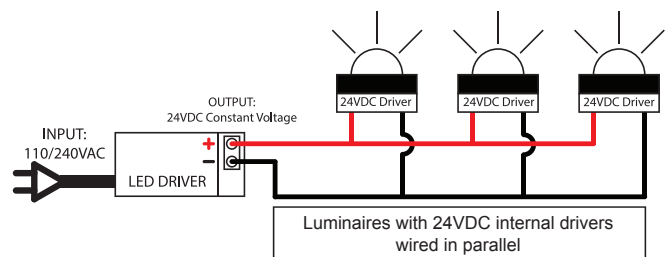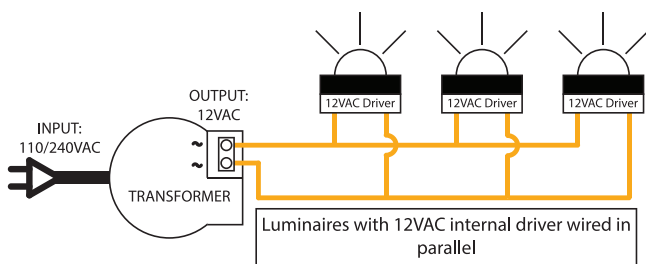

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

Specifications may change without notification

Aug 2017