

Surface Mount Solid Eyelid with PureLED



PROJECT:
TYPE:
SOURCE:
NOTES:

SPECIFICATIONS



LED Chip	Cree XPG-3 Plug and Play field replaceable LED board
Luminaire Output*	120 Lumens @ 700mA (2 watts) 60 Lumens @ 350mA (1 watt)
Lumens Per Watt*	60 Lumens minimum @ 2 watts
LED Life Expectancy	50,000 hours L70
CRI (3000K)	90+
Colour Temperatures	2700K, 3000K, 4000K
Beam Angle	60°
Lens	ONLY available as Frosted
Ingress Protection	IP66
Warranty	Electronics = 5 years Copper/Stainless Steel Body = 10 years
Standards	AS/NZS 61046, cUL 1838, 2108, CSA C22.2 No.250.7, No.250.0-08 CE
B Number	94.05


*Delivered from the Luminaire with unobstructed beam

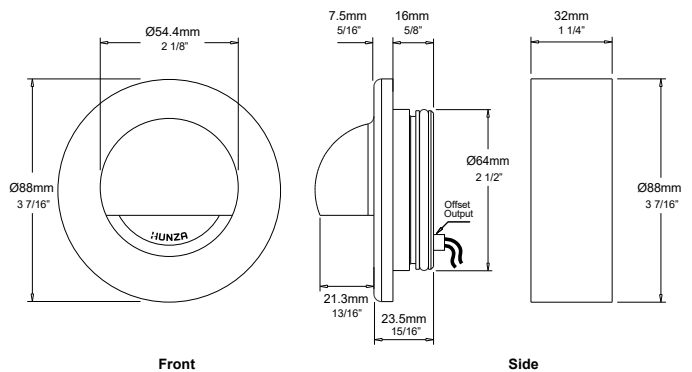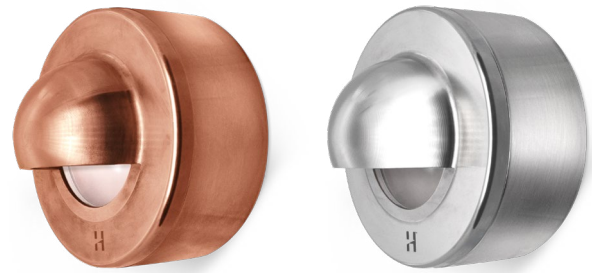

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. SMSE/L

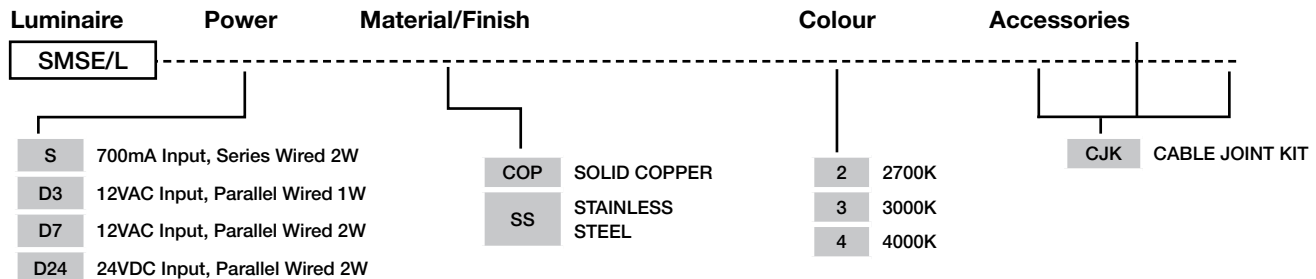

S
Series Wired - Remote Driver (Required Not Supplied):
Constant current driver.
Individual fixtures require 3VDC @ 700mA maximum

D3 D7
12VAC Integral Driver (Included):
Hunza™ Buckbullet driver
Input: 12VAC, 2 watt total
Output: D3 = 3VDC @ 350mA
D7 = 3VDC @ 700mA

D24
24VDC Driver:
(24VDC Output Driver not included)
Input: 24VDC
Output: 3VDC @ 700mA constant current (non dimming)
Note: Not for USA

[Click here for 240v Remote Power Supply Guidance Charts](#)
[Click here for USA Remote Power Supply Guidance Charts](#)

Mar 2022 V1

*Due to continued product enhancements, specifications may change without notification.

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

316 Stainless Steel:

Body: 88mm (3½") x 9mm (3/8") 316 stainless steel tube.

End cap: solid 316 stainless steel 63.5mm (2½") rod.

Flange: solid 316 stainless steel 63.5mm (2½") rod.

Copper:

Body: 88mm (3½") x 9mm (3/8") copper tube.

End cap: solid copper 63.5mm (3½") rod.

Flange: solid copper 88mm (3½") rod.

Lens:

10mm (3/8") Extra clear, low iron, shatter resistant glass.

Lifetime warranty.

Gaskets:

Silicone, iron impregnated 220°C (428°F)

Mounting:

The luminaire is secured to a surface by three mounting screws

Luminaire Weight:

Copper: 1.30kg (2lb 14 oz)


Stainless steel: 2.00kg (2lb 3oz)



BEAM ANGLES

High efficiency PMMA TIR lenses. Field replaceable

IES files available for download: hunzalighting.com/downloads




60° FWHM
TIR

WIRING GUIDE


Available for download: hunzalighting.com/downloads

NOTE: Diagrams are a guide only, wire colours and polarity may change depending on fixture and country.


Series/Remote Driver

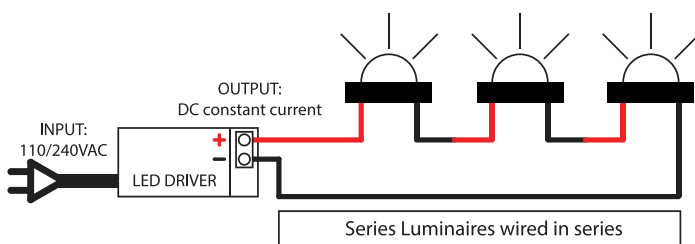

12V Integral Driver

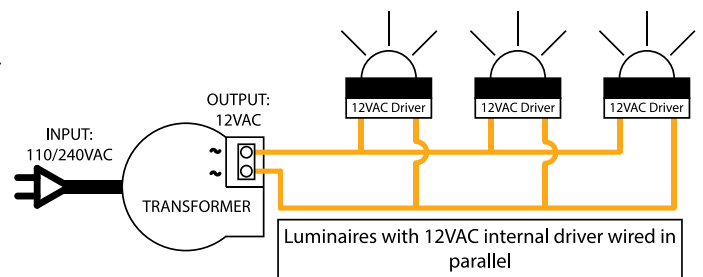

24VDC Integral Driver

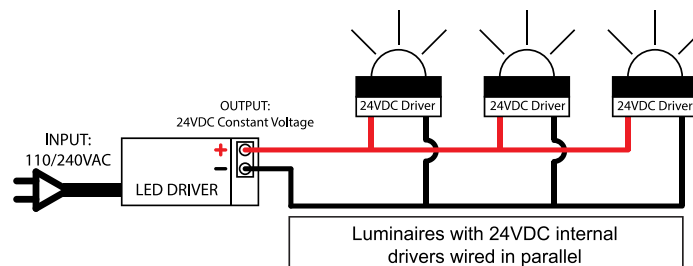

Mar 2022 V1

*Due to continued product enhancements, specifications may change without notification.



HUNZA LIGHTING
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: +64-9-528 9471
Fax: +64-9-528 9471
hunza@hunza.co.nz
www.hunzalighting.com

INTERNATIONAL CONTACTS:
www.hunzalighting.com/contact

This document contains proprietary information of Hunza™. Its receipt or possession does not convey any rights to reproduce or disclose its content.