


# Tier Lite

Cat. No. TL

Cat. No. TL/R

Cat. No. TLG9

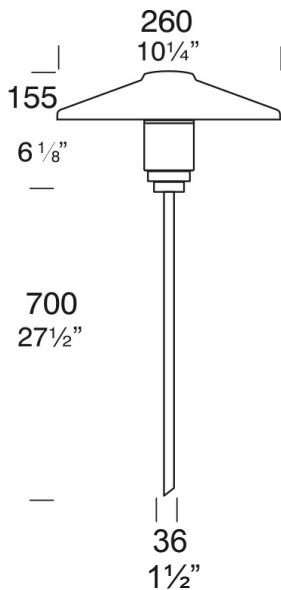

The Tier Lite is designed for illuminating medium level foliage. It is mounted on a 700mm pole to provide a soft pool of light suitable for a wide variety of landscape situations.

The Retro™, which is a mains option, avoids the need to bury a transformer. The 110/240-12 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer this changes the luminaire to an IP56 rating.

A G9 version of this luminaire is also available for line voltage lamps.

## Ordering Information

### Luminaire Type

TL - Tier Lite  
 TL/R - Tier Lite Retro  
 TLG9 - Tier Lite G9

### Material/Finish

BK - Black  
 BZ - Bronze  
 CT - Corten  
 DG - Dark Grey  
 OG - Olive Green  
 STAR - Silver Star  
 WB - White Birch  
 WH - White  
 COP - Copper  
 SS - Stainless Steel

### Accessories

CJK150 - Cable Joint Kit  
 SSP/G - Super Spike  
 (not for Retro)

Ordering example: TL BK - Tier Lite in Black  
 TL/R COP - Tier Lite Retro in Copper  
 TLG9 SS - Tier Lite G9 in Stainless Steel  
 SSP/G - Super Spike  
 (accessories ordered separately)

## Luminaire Construction

**CNC machined from one of the following metals:**  
**Aluminium**

High corrosion resistant with chromate substrate and high UV resistant polyester powder coat.

Body: 63.5mm (2½") x 10mm (3/8") aluminium tube.

End cap: solid aluminium 63.5mm (2½") rod.

Pole: 38.1mm (1½") x 700mm (27½") aluminium tube.

Retro pole: 38.1mm (1½") x 300mm (11¾") and 63.5mm (2½") x 400mm (15¾") aluminium tube.

Hood: 260mm (10¼") 1.2mm (1/16") hand spun aluminium.

Colours:

Black, Bronze, Corten, Dark Grey, Olive Green, Silver Star, White Birch, White.

### Copper

Body: 63.5mm (2½") x 10mm (3/8") copper tube.

End cap: solid copper 63.5mm (2½") rod. Pole: 38.1mm (1½") x 700mm (27½") copper tube.

Retro pole: 38.1mm (1½") x 300mm (11¾") and 63.5mm (2½") x 400mm (15¾") copper tube.

Hood: 260mm (10¼") 1.2mm (1/16") hand spun copper.

## 316 Stainless Steel

Body: 63.5mm (2½") x 10mm (3/8") stainless steel tube.

End cap: solid stainless steel 63.5mm (2½") rod.

Pole: 38.1mm (1½") x 700mm (27½") stainless steel tube.

Retro pole: 38.1mm (1½") x 300mm (11¾") and 63.5mm (2½") x 400mm (15¾") stainless steel tube.

Hood: 260mm (10¼") 1.2mm (1/16") hand spun stainless steel.

## Mounting

Pole 700mm (27½") directly mounted into the earth or for extra stability in sand or loose ground, use a Super Spike (Cat. SSP/G). Can also be set in concrete.

## Features

### Lens

UV stable polycarbonate.

### Anti Glare Hood

260mm (10¼"). No upward light or glare projected.

### Gaskets

Silicone, iron impregnated 220°C (428°F).

### Lamp Holders


G4 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) Teflon cables.

G9 - 280°C (536°F) ceramic lamp holder with 250°C (480°F) Teflon cables.

## Accessories

**Cable Joint Kit** (Cat. CJK150). Not approved for USA/Canada.  
**Super Spike** (Cat. SSP/G).

## Standards

IP56/66, UL1838, 

## Luminaire Weight

12 volt - **Aluminium** - 0.915kg (2lb)  
**Copper** - 1.590kg (5lb 11oz)  
**Stainless Steel** - 1.450kg (3lb 3oz)  
Retro - **Aluminium** - 2.000kg (4lb 6oz)  
**Copper** - 3.000kg (6lb 9oz)  
**Stainless Steel** - 2.900kg (6lb 6oz)

## Power Supply

**12 volt** - Hunza Inground or Wall Mount Transformer: not included.

### USA and Canada

Hunza Wall Mount Transformer: not included.

**Retro** - Hunza 110/240-12 volt ac silicone encapsulated electronic transformer is built into the pole. Dimmable with a suitable dimmer.

## Lamp Options

### 12 volt

G4 - 5, 10 or 20 watt lamp max.

G9 - 25 watt lamp max.

### USA and Canada


G4 - 5, 10 or 20 watt lamp max.

G9 - 25 watt lamp max.

### Retro

G4 - 10 or 20 watt lamp max.

Tier Lite G4 20 watt Bi-Pin lamp - Lens height 650mm (25½")

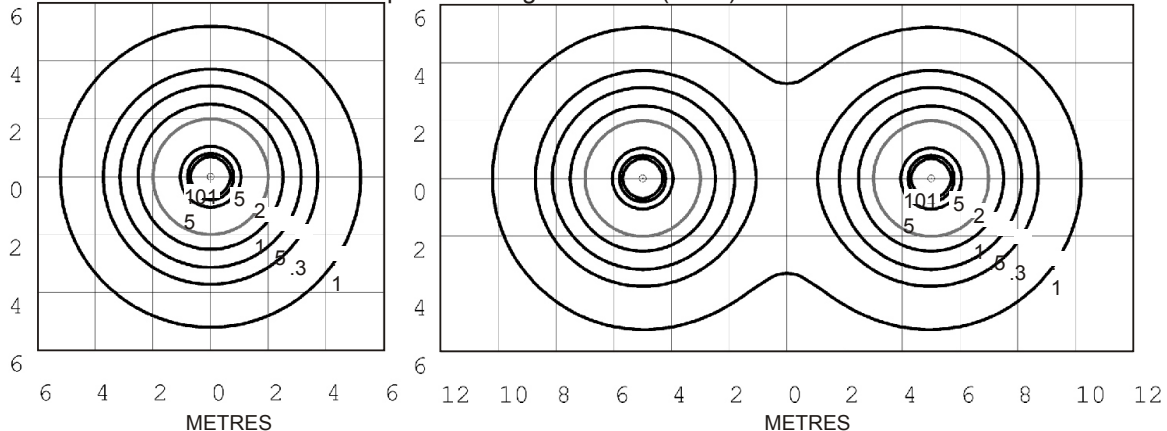

Isolux Lumens Plot - Footcandles = Isolux figures divided by 10.76

**HUNZA**™ PURE  
 OUTDOOR  
 LIGHTING

HUNZA FACTORY  
 130 Felton Mathew Ave  
 Glen Innes  
 Auckland 1072  
 New Zealand

Ph: 64-9-528 9471  
 Fax: 64-9-528 9361  
 hunza@hunza.co.nz  
 www.hunzalighting.com

INTERNATIONAL CONTACTS:  
<http://www.hunzalighting.com/contact.php>  
 Specification may change without notice.  
 Manufactured in New Zealand.  
 © 2016 Hunza Holdings Ltd.