

# Twin Pole Lite

Cat. No. TPL

Cat. No. TPL/R

Cat. No. TPLGU



The Twin Pole Lite is ideal for path lighting as well as tree lighting, or the head may be aimed downward to eliminate vertical light. The fitting has two individual spot lights which can be aimed in two entirely different directions. Each spot light has a fully adjustable arm allowing 360 degree rotation and 0 - 90 degree elevation.

The Retro™, which is a mains option, avoids the need to bury a transformer. The 110/240-12 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer, this changes the luminaire to an IP56 rating.

A GU10 version of this luminaire is also available for line voltage lamps.

## Ordering Information

### Luminaire Type

- TPL - Twin Pole Lite
- TPL/R - Twin Pole Lite Retro
- TPLGU - Twin Pole Lite GU10


### Material/Finish

- BK - Black
- BZ - Bronze
- CT - Corten
- DG - Dark Grey
- OG - Olive Green
- STAR - Silver Star
- WB - White Birch
- WH - White
- COP - Copper
- SS - Stainless Steel

### Accessories

- CJK150 - Cable Joint Kit
- GG - Glare Guard
- HCL - Hex Cell Louvre
- LENSSTEPF - Frosted Lens

Ordering example: TPL BK - Twin Pole Lite in Black  
 TPL/R COP - Twin Pole Lite Retro in Copper  
 TPLGU SS - Twin Pole Lite GU10 in Stainless Steel  
 LENSSTEPF - Frosted Lens  
 (accessories ordered separately)

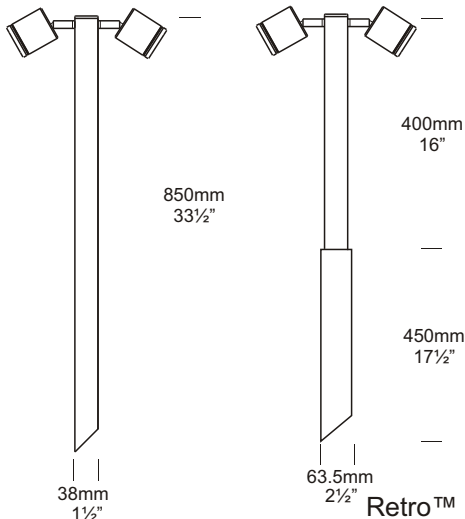

## Luminaire Construction

**CNC machined from one of the following metals:**

### Aluminium

High corrosion resistant aluminium with chromate substrate and high UV resistant powder coat.

Body: 63.5mm (2½") x 10mm (3/8") tube.

End cap: solid aluminium 63.5mm (2½") rod.

Pole: 38.1mm (1½") x 850mm (33½") aluminium tube.

Retro pole: 38.1mm (1½") x 400mm (15¾") and 63.5mm (2½") x 450mm (17¾") aluminium tube.

Colours:

Black, Bronze, Corten, Dark Grey, Olive Green, Silver Star, White Birch, White.

### Copper

Body: 63.5mm (2½") x 10mm (3/8") tube.

End cap: solid copper 63.5mm (2½") rod.

Pole: 38.1mm (1½") x 850mm (33½") copper tube.

Retro pole: 38.1mm (1½") x 400mm (15¾") and 63.5mm (2½") x 450mm (17¾") copper tube.

### 316 Stainless Steel

Body: 63.5mm (2½") x 10mm (3/8") tube.

End cap: solid stainless steel 63.5mm (2½") rod.

Pole: 38.1mm (1½") x 850mm (33½") stainless steel tube.

Retro pole: 38.1mm (1½") x 400mm (15¾") and 63.5mm (2½") x 450mm (17¾") stainless steel tube.

## Features

### Lens

10mm (3/8") clear flush fit shatter resistant glass.

Lifetime Warranty.

### Gaskets

Silicone, iron impregnated 220°C (428°F).

### Lamp Holder

MR16 & GU10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) Teflon cables.

## Accessories

**Cable Joint Kit** (Cat. CJK150). Not approved for USA/Canada.

**Glare Guard** (Cat. GG).

**Hex Cell Louvre** (Cat. HCL).

**Frosted Lens** (Cat. LENSSTEPF).

## Swivel

**Aluminium and Copper luminaires** - 360° rotation and 0-90° elevation, solid brass with anti rust spring.

**Stainless Steel luminaires** - 360° rotation and 0-90° elevation, full stainless steel construction.

## Standards

IP56/66, UL1838,



## Luminaire Weight

**12 volt** - Aluminium - 1.200kg (2lb 10oz)

Copper - 3.500kg (7lb 7oz)

Stainless Steel - 2.800kg (6lb 2oz)

**Retro** - Aluminium - 2.300kg (5lb 1oz)

Copper - 4.300kg (8lb 9oz)

Stainless Steel - 3.600kg (7lb 11oz)

## Power Supply

**12 volt** - Hunza Inground or Wall Mount Transformer: not included.

USA and Canada

Hunza Wall Mount Transformer: not included.

**Retro** - Hunza 110/240-12 volt ac potted electronic transformer is built into the pole. Dimmable with a suitable dimmer.

## Lamp Options










MR16 - 20 or 35 watt lamp max.

GU10 - 25 or 35 watt lamp max.

USA and Canada

MR16 - 20 watt lamp max.

GU10 - lamp not supplied.



**HUNZA**™ PURE OUTDOOR LIGHTING

HUNZA FACTORY  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunzalighting.com

INTERNATIONAL CONTACTS:  
<http://www.hunzalighting.com/contact.php>  
Specification may change without notice.  
Manufactured in New Zealand.  
© 2016 Hunza Holdings Ltd.