



# MP15

## Electronic Constant Current Driver Cat. No. MP15

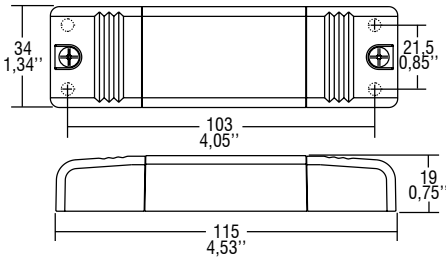

The TCI MP15 is a 15 Watt electronic, constant current, remote driver available to power Hunza series version PURE LED fixtures. It includes a DIP-SWITCH control system that enables the unit to be set at a range of current outputs from 60mA to 360mA. Not dimmable, other than by the DIP-SWITCH control.

For exterior use, it is highly recommended to install this in a weatherproof box, available as an option from Hunza. The PC-17-02 weatherproof box is a requirement for UL compliance.

When this driver is used as a remote power supply, SERIES WIRING is required to connect the fixtures. Please refer to the Hunza PURE LED Series Wiring page for more information on wiring diagrams and fixture loads per driver.

### Key Specifications:

- Input Voltage: 90-264Vac 50-60Hz, 170-280Vdc
- Output Voltage: 0V-41.5V dc
- Output Current: 60 – 360mA (depending on DIP-SWITCH setting)
- Wattage: 2.5W – 15W (depending on DIP-SWITCH setting)
- Temperature range: -25...+45°C, max 75°C
- Driver Weight: 0.065kg (2.3oz)
- Standards: IP20, EN, CE, CSA, UL Recognized
- Ordering Code: MP15



**HUNZA**™ PURE  
OUTDOOR  
LIGHTING

**HUNZA FACTORY**  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
[www.hunzalighting.com](http://www.hunzalighting.com)

**INTERNATIONAL CONTACTS:**  
[www.hunzalighting.com/contact.php](http://www.hunzalighting.com/contact.php)  
Specifications may change without notice.  
Manufactured in New Zealand.  
**2016 Hunza Productions Ltd.**