



MP15

Electronic Constant
Current Driver
Cat. No. MP15

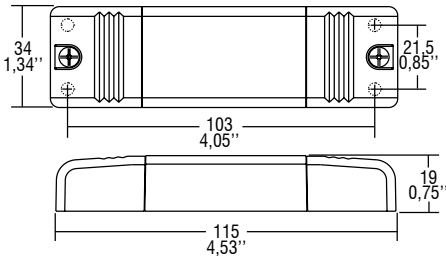

The TCI MP15 is a 15 Watt electronic, constant current, remote driver available to power Hunza series version PURE LED fixtures. It includes a DIP-SWITCH control system that enables the unit to be set at a range of current outputs from 60mA to 360mA. Not dimmable, other than by the DIP-SWITCH control.

For exterior use, it is highly recommended to install this in a weatherproof box, available as an option from Hunza. The PC-17-02 weatherproof box is a requirement for UL compliance.

When this driver is used as a remote power supply, SERIES WIRING is required to connect the fixtures. Please refer to the Hunza PURE LED Series Wiring page for more information on wiring diagrams and fixture loads per driver.

Key Specifications:

- Input Voltage: 90-264Vac 50-60Hz, 170-280Vdc
- Output Voltage: 0V-41.5V dc
- Output Current: 60 – 360mA (depending on DIP-SWITCH setting)
- Wattage: 2.5W – 15W (depending on DIP-SWITCH setting)
- Temperature range: -25...+45°C, max 75°C
- Driver Weight: 0.065kg (2.3oz)
- Standards: IP20, EN, CE, CSA, UL Recognized
- Ordering Code: MP15



HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunzalighting.com

INTERNATIONAL CONTACTS:
www.hunzalighting.com/contact.php
Specifications may change without notice.
Manufactured in New Zealand.
2016 Hunza Productions Ltd.