

Cube Bollard Cloak PURE LED

PROJECT:
TYPE:
SOURCE:
NOTES:


SPECIFICATIONS



LED Chip	Cree XPG-3 Plug and Play field replaceable LED board
Luminaire Output	120 Lumens @ 700mA, 70 Lumens @ 350mA delivered from luminaire with unobstructed beam.
Lumens Per Watt	70 Lumens minimum @ 1 watt, 60 Lumens @ 2 watts delivered from luminaire with unobstructed beam
CRI (3000K)	90+
Colour Temperatures	2700K, 3000K, 4000K
Beam Angles	Asymmetric
Ingress Protection	IP66
Warranty	Electronics = 5 years Body Aluminium = 5 years
Standards	AS/NZS 61046 cUL 1838, 2108 CSA C22.2 No.250.7, No.250.0-08 CE




Flange Mount

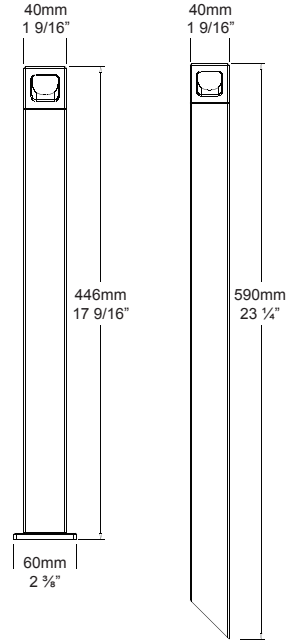

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. CBOLCL(1-4)/L

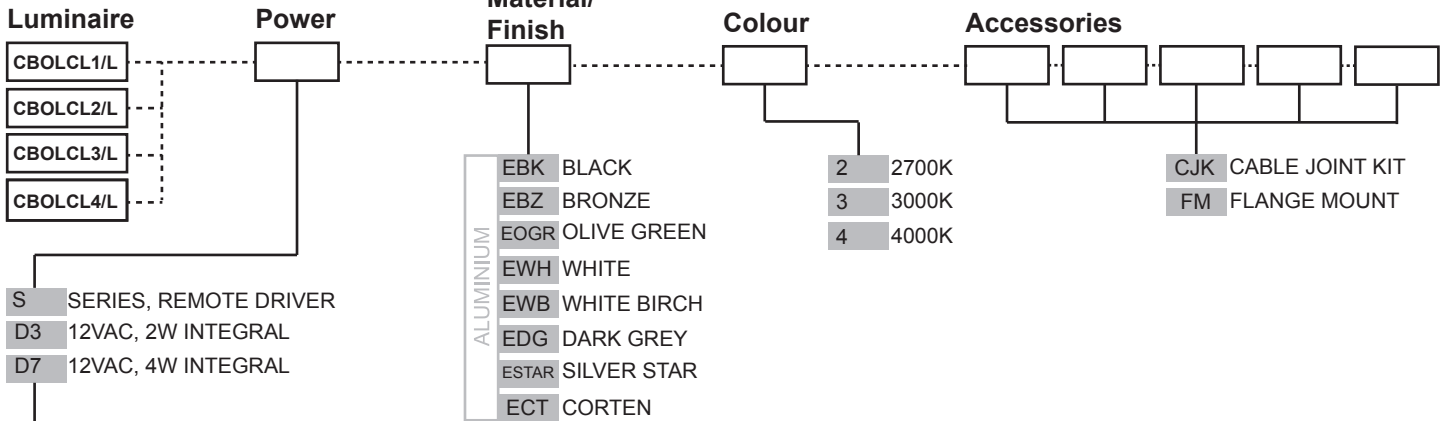

SERIES, REMOTE DRIVER REQUIRED:
Constant current driver
Individual fixtures require 3vdc @ 1050mA maximum

12VAC INTEGRAL DRIVER:
Buckbullet driver (included)
Input: 12VAC
Output: 3vdc @ D3=350mA, D7=700mA

LUMINAIRE CONSTRUCTION

CNC machined from one of the following

metals:

Aluminium:

Pole: High corrosion resistant 40mm (1½") x 4mm (3/16") aluminium square tube.

Head: 40mm (1½") x 40mm (1½") solid aluminium square bar, with chromate substrate and high UV resistant polyester powder coat.

Colours:

Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

Lens:

Acrylic lens.

Do not clean with petrochemical substances.

Gaskets:

Silicone, iron impregnated 220°C (428°F)

Mounting:

Set in concrete in the ground or specify with flange mount option, which bolts to concrete, tiling or wooden decks.

Luminaire Weight:

Alum: 0.500kg (1lb 2oz)


ACCESSORIES

BEAM ANGLES

IES files available for download: <http://www.hunzalighting.com/download.php>

WIRING GUIDE


Series/remote driver

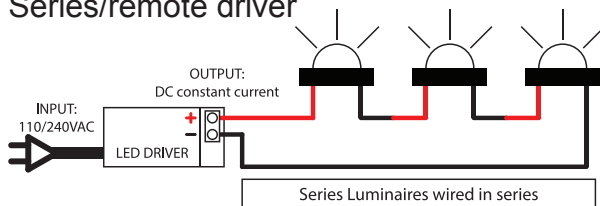

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

available for download: <http://www.hunzalighting.com/download.php>

12v integral driver

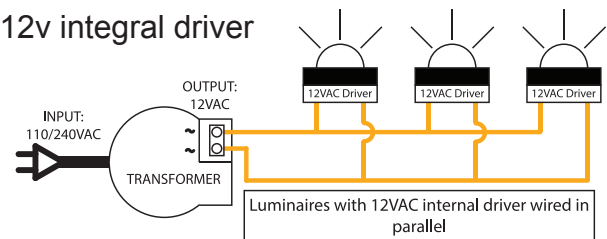

Specifications may change without notification

Aug 2017

HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY 130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: +64-9-528 9471
Fax: +64-9-528 9361
hunza@hunza.co.nz
www.hunzalighting.com

INTERNATIONAL CONTACTS:
<http://www.hunzalighting.com/contact.php>

This document contains proprietary information of Hunza. Its receipt or possession does not convey any rights to reproduce or disclose its content.