


Lighting Transformer

Cat. No. H20 H40 H50



The HUNZA™ H50 Lighting Transformer is designed to operate at the lowest possible temperature. Due to its low profile the H20/40/50 can be fitted through a 63mm diameter hole. Wiring is made much easier by use of a 25 amp (6mm diameter terminal) connector block which facilitates quick and easy wire-in and loop-out connections. For internal use only.

Ordering Information

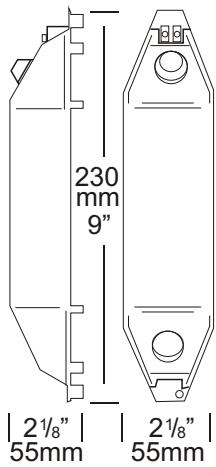

Luminaire Type	Material/Finish	Accessories
H20 - 20 watt H40 - 40 watt H50 - 50 watt	Black Aluminum with nylon 66 plastic endcaps	FP - Flex and Plug
<p>Ordering Example H20 - Transformer 20 watt output FP - Flex and Plug _____ (Accessories ordered separately)</p>		



Transformer Construction

Case:

Matt black aluminium, acts as a heat sink.

Transformer 20, 40 and 50 watt.

Wire wound, welded laminations, Class H Insulation with fuse protection on secondary side.

Terminal Junction Box & End Cap:

Nylon 66.

Mounting

Due to its low profile the H50 can be fitted through a 63mm diameter hole. For internal use only.

Features

Termination Size:

Primary: 20 amp terminals for easy wire in and loop-out connections.

Secondary: 3 amp terminals for lamp holder termination.

Voltages:

Primary: 240/250 volt 50Hz.

Secondary: 11.5 volts hot.

Wattages:

20 watt, 40 watt, 50 watt.

Dimming:

A dimmer suitable for magnetic transformers. Check with dimmer manufacturer before connecting.

Fuse:

Replaceable glass 4 amp slow blow for short circuit protection.

Accessories:

Pre wired with 1 x metre. Flex and Plug.

Standards

AS3108

W/2306

Transformer Weight

1.0kg (2lb 3oz)

20, 40 and 50 watt